

## TEST REPORT

**Applicant:** Dragino Technology Co., Limited  
**Address of Applicant:** Room 202, Block B, BCT Incubation Bases (BaoChengTai),  
No.8 CaiYunRoadLongCheng Street, LongGang District,  
Shenzhen 518116,China  
**Manufacturer/Factory:** Dragino Technology Co., Limited  
**Address of Manufacturer/Factory:** Room 202, Block B, BCT Incubation Bases (BaoChengTai),  
No.8 CaiYunRoadLongCheng Street, LongGang District,  
Shenzhen 518116,China

### Equipment Under Test (EUT)

**Product Name:** LoRaWAN Gateway  
**Model No.:** LPS8  
**Trade Mark:** Dragino  
**Applicable standards:** ETSI EN 300 220-1 V3.1.1 (2017-02)  
ETSI EN 300 220-2 V3.1.1 (2017-02)  
**Date of sample receipt:** Nov. 29, 2019  
**Date of Test:** Dec. 02- Dec. 09, 2019  
**Date of report issue:** Dec. 11, 2019  
**Test Result :** Pass \*

\*In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 2014/53/EU are considered.



**Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



## 2 Version

Version No.	Date	Description
00	Dec. 11, 2019	Original

**Prepared By:**




**Date:**

Dec. 11, 2019

**Project Engineer**

**Check By:**



**Date:**

Dec. 11, 2019

**Reviewer**

## 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 GENERAL DESCRIPTION OF EUT .....	5
5.2 TEST MODE .....	6
5.3 TEST FACILITY .....	7
5.4 TEST LOCATION .....	7
5.5 DESCRIPTION OF SUPPORT UNITS .....	7
5.6 DEVIATION FROM STANDARDS .....	7
5.7 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
5.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	7
6 TEST INSTRUMENTS LIST .....	8
7 RADIO TECHNICAL REQUIREMENTS SPECIFICATION IN ETSI EN 300 220-2 .....	9
7.1 TEST CONDITIONS .....	9
7.2 TRANSMITTER REQUIREMENT .....	9
7.2.1 Operation Frequency .....	9
7.2.2 Effective Radiated Power .....	10
7.2.3 Duty Cycle .....	12
7.2.4 Occupied Bandwidth .....	13
7.2.5 Frequency Error .....	15
7.2.6 TX Out Of Band Emissions .....	16
7.2.7 Transient power .....	18
7.2.8 Adjacent Channel Power .....	20
7.2.9 Adaptive Power Control .....	20
7.2.10 Transmit spurious emissions .....	21
7.3 RECEIVER REQUIREMENTS .....	25
7.3.1 Receiver sensitivity .....	25
7.3.2 Clear Channel Assessment threshold .....	25
7.3.3 Not applicable, since the test applied to Polite spectrum access equipment .....	25
7.3.4 Adaptive Frequency Agility .....	25
7.3.5 Adjacent channel selectivity .....	25
7.3.6 Receiver saturation at Adjacent Channel .....	25
7.3.7 Spurious response rejection .....	25
7.3.8 Behaviour at high wanted signal level .....	25
7.3.9 Bi-Directional Operation Verification .....	25
7.3.10 Blocking .....	26
7.3.11 Spurious emissions .....	28
8 TEST SETUP PHOTO .....	32
9 EUT CONSTRUCTIONAL DETAILS .....	32

## 4 Test Summary

Radio Spectrum Matter (RSM) Part of Tx				
Test item	Test Requirement	Test method	Limit/Severity	Result
Operating frequency(Declared by manufacturer)	ETSI EN 300 220-2	ETSI EN 300 220-1	Annexes B or C of EN 300 220-2	Pass
Effective Radiated Power	ETSI EN 300 220-2	ETSI EN 300 220-1	Annexes B or C of EN 300 220-2	Pass
Maximum e.r.p. Spectral Density	ETSI EN 300 220-2	ETSI EN 300 220-1	Annexes B or C of EN 300 220-2	N/A
Duty cycle	ETSI EN 300 220-2	ETSI EN 300 220-1	Annexes B or C of EN 300 220-2	Pass
Occupied Bandwidth	ETSI EN 300 220-2	ETSI EN 300 220-1	Annexes B or C of EN 300 220-2	Pass
Frequency Error	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.7	Pass
Tx Out of Band Emissions	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.8.2	Pass
Transmit Spurious Emmissions	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.9.2	Pass
Transient Power	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.10.2	Pass
Adjacent Channel Power	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.11.2	N/A
TX behaviour under Low Voltage Conditions	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.12.2	N/A
Adaptive Power Control	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.13.2	N/A
Short Term Behaviour	ETSI EN 300 220-2	N/A	annex C, table C.1	N/A
FHSS Equipment Requirements	ETSI EN 300 220-2	N/A	Clause 4.3.10.2	N/A
Radio Spectrum Matter (RSM) Part of Rx				
Test item	Test Requirement	Test method	Limit/Severity	Result
Receiver sensitivity	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.14.2	N/A
Adjacent channel selectivity	ETSI EN 300 220-1	ETSI EN 300 220-1	Clause 5.15.2	N/A
Receiver saturation at Adjacent Channel	ETSI EN 300 220-1	ETSI EN 300 220-1	Clause 5.16.2	N/A
Spurious response rejection	ETSI EN 300 220-1	ETSI EN 300 220-1	Clause 5.17.2	N/A
Blocking	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.18.2	Pass
Behaviour at high wanted signal level	ETSI EN 300 220-1	ETSI EN 300 220-1	Clause 5.19.2	N/A
Clear Channel Assessment threshold	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.21.2.2	N/A
Polite spectrum access timing parameters	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.21.3.1	N/A
Adaptive Frequency Agility	ETSI EN 300 220-2	N/A	N/A	N/A
Receive Spurious emmissions	ETSI EN 300 220-2	ETSI EN 300 220-1	Clause 5.9.2	Pass
Bi-Directional Operation Verification	ETSI EN 300 220-1	ETSI EN 300 220-1	Clause 5.22.2	N/A

## 5 General Information

Applicant:	Dragino Technology Co., Limited
Address of Applicant:	Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoadLongCheng Street, LongGang District, Shenzhen 518116, China
Manufacturer/Factory:	Dragino Technology Co., Limited
Address of Manufacturer/Factory:	Room 202, Block B, BCT Incubation Bases (BaoChengTai), No.8 CaiYunRoadLongCheng Street, LongGang District, Shenzhen 518116, China

### 5.1 General Description of EUT

Product Name:	LoRaWAN Gateway
Model No.:	LPS8
Trade Mark	Dragino
Operation Frequency:	863MHz-870MHz
Occupied bandwidth	200kHz
Number of Channels:	35
Antenna type:	External antenna
Modulation type:	FSK
Antenna Gain:	2.69dBi
Hardware Version:	LPS8 V1.2
Software Version:	LG02_LG08--build-v5.1.1552217854-20190310-1939
Power supply:	DC 5.0V From Adapter

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	<b>863.1MHz</b>	10	864.7MHz	19	866.7MHz	28	868.5MHz
2	863.3MHz	11	864.9MHz	20	866.9MHz	29	868.7MHz
⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
8	864.5MHz	17	866.3MHz	26	868.1MHz	35	<b>869.9MHz</b>
9	864.7MHz	18	<b>866.5MHz</b>	27	868.3MHz		

Test Channel	Frequency(MHz)
Lowest channel	863.1
Middle channel	866.5
Highest channel	869.9

## 5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
Receiving mode	Keep the EUT in receiving mode

### 5.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC —Registration No.: 381383**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383.

● **IC —Registration No.: 9079A**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A

● **NVLAP (LAB CODE:600179-0)**

Global United Technology Services Co., Ltd., is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP). LAB CODE:600179-0

### 5.4 Test Location

Radiated spurious emissions tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 123- 128, Tower A, Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960

All other tests were performed at:

Shenzhen CST Technology Service Co., Ltd.

Room 110, Floor 1st, Building D, Baoan Zhigu Technology Park, Xixiang Street, Baoan District, Shenzhen, China. 518000

Telephone: +86 (0) 755 2779 7627

### 5.5 Description of Support Units

None

### 5.6 Deviation from Standards

None

### 5.7 Abnormalities from Standard Conditions

None

### 5.8 Other Information Requested by the Customer

None

## 6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June. 27 2019	June. 26 2020
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June. 27 2019	June. 26 2020
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120 D	GTS208	June. 27 2019	June. 26 2020
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	June. 27 2019	June. 26 2020
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	June. 27 2019	June. 26 2020
9	Coaxial Cable	GTS	N/A	GTS211	June. 27 2019	June. 26 2020
10	Coaxial cable	GTS	N/A	GTS210	June. 27 2019	June. 26 2020
11	Coaxial Cable	GTS	N/A	GTS212	June. 27 2019	June. 26 2020
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June. 27 2019	June. 26 2020
13	Amplifier(2GHz-20GHz)	HP	84722A	GTS206	June. 27 2019	June. 26 2020
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June. 27 2019	June. 26 2020
15	Band filter	Amindeon	82346	GTS219	June. 27 2019	June. 26 2020
16	Power Meter	Anritsu	ML2495A	GTS540	June. 27 2019	June. 26 2020
17	Power Sensor	Anritsu	MA2411B	GTS541	June. 27 2019	June. 26 2020
18	Wideband Radio Communication Tester	Rohde & Schwarz	CMW500	GTS575	June. 27 2019	June. 26 2020
19	Splitter	Agilent	11636B	GTS237	June. 27 2019	June. 26 2020
20	Loop Antenna	ZHINAN	ZN30900A	GTS534	June. 27 2019	June. 26 2020
21	Breitband hornantenne	SCHWARZBECK	BBHA 9170	GTS579	Oct. 20 2019	Oct. 19 2020
22	Amplifier	TDK	PA-02-02	GTS574	Oct. 20 2019	Oct. 19 2020
23	Amplifier	TDK	PA-02-03	GTS576	Oct. 20 2019	Oct. 19 2020
24	PSA Series Spectrum Analyzer	Rohde & Schwarz	FSP	GTS578	June. 27 2019	June. 26 2020

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	KTJ	TA328	GTS243	June. 27 2019	June. 26 2020
2	Barometer	ChangChun	DYM3	GTS255	June. 27 2019	June. 26 2020



## 7 Radio Technical Requirements Specification in ETSI EN 300 220-2

### 7.1 Test conditions

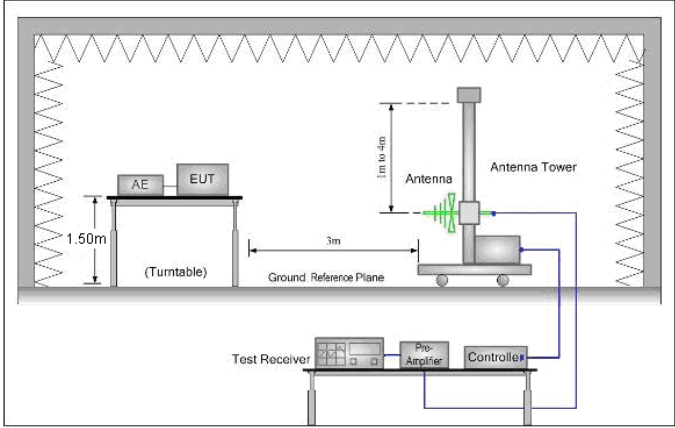
Normal conditions	Ambient:	Temperature.:	+15°C to +35°C
		relative humidity:	20 % to 75 %
	Power supply:	Battery:	Nominal
		AC mains source	Nominal
Other power sources		Nominal	
Extreme conditions	Ambient:	Temperature.:	-20°C to +55°C
	Power supply:	Battery:	0.9 and 1.3 multiplied for lead-acid battery 0.85 and 1.15 multiplied for "gel-cell" type batteries 0.85 and 0.9 multiplied for lithium and nickel-cadmium type batteries For other types it may be declared by manufacturer
		AC mains source	± 10% of the nominal power source
		Other power sources	Declared by manufacturer

### 7.2 Transmitter Requirement

#### 7.2.1 Operation Frequency

The Operational Frequency band was declared by the manufacturer which conforms annexes B, C or any NRI of ETSI EN 300220-2.

## 7.2.2 Effective Radiated Power

Test Requirement:	ETSI EN 300 220-2 clause 4.3.1
Test Method:	ETSI EN 300 220-1 clause 5.2
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Receiver setup:	RBW=120kHz, VBW=300kHz, Detector= peak
Limit:	25mW=14dBm (Refer to Annex B of ETSI EN 300220-2)
Test setup:	
Test procedure:	<p>Substitution method was performed to determine the actual ERP emission levels of the EUT.</p> <p>The following test procedure as below:</p> <ol style="list-style-type: none"> <li>1. On the test site as test setup graph above, the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider.</li> <li>2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver.</li> <li>3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.</li> <li>4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.</li> <li>5. Repeat step 4 for test frequency with the test antenna polarized horizontally.</li> <li>6. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At the lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.</li> <li>7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal</li> </ol>

	<p>generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.</p> <p>8. Repeat step 7 with both antennas horizontally polarized for each test frequency.</p> <p>9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:</p> $\text{ERP(dBm)} = \text{Pg(dBm)} + \text{antenna gain (dBd)}$ <p>where:</p> <p>Pg is the generator output power into the substitution antenna.</p>
Measurement Record:	Uncertainty: $\pm 1.5\text{dB}$
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Channel	ERP Level (dBm)	Limit (dBm)	Result
Lowest	11.95	14.00	Pass
Middle	11.93		
Highest	11.91		

Remark: Peak value is applicable.

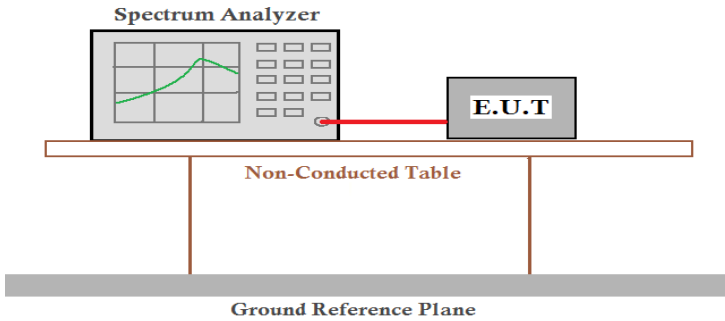
### 7.2.3 Duty Cycle

Test Requirement:	ETSI EN 300 220-2 clause 4.3.3
Test Method:	ETSI EN 300 220-1 clause 5.4
Limit:	0.1%
Limit:	The device is manual operation for remote controller. It's declared by the manufacturer as a duty cycle ratio of less than 10%.
Result:	Pass

### Measurement Data

Channel	Ton time(ms)	Tcycle time(s)	Dutycycle	Limit	Result
Lowest	7.53	8.00	0.094%	0.1%	Pass
Middle	7.53	8.00	0.094%	0.1%	Pass
Highest	7.51	8.00	0.094%	0.1%	Pass

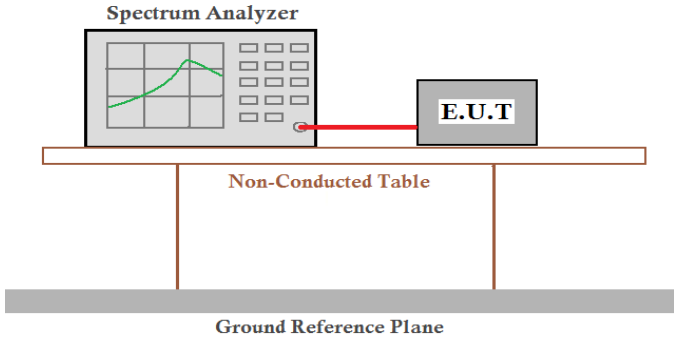
## 7.2.4 Occupied Bandwidth

Test Requirement:	ETSI EN 300 220-2 clause 4.3.4																					
Test Method:	ETSI EN 300 220-1 clause 5.6																					
Receive setup:	<p style="text-align: center;"><b>Table 12: Test Parameters for Max Occupied Bandwidth Measurement</b></p> <table border="1"> <thead> <tr> <th>Setting</th> <th>Value</th> <th>Notes</th> </tr> </thead> <tbody> <tr> <td>Centre frequency</td> <td>The nominal Operating Frequency</td> <td>The highest or lowest Operating Frequency as declared by the manufacturer</td> </tr> <tr> <td>RBW</td> <td>1 % to 3 % of OCW without being below 100 Hz</td> <td></td> </tr> <tr> <td>VBW</td> <td>3 x RBW</td> <td>Nearest available analyser setting to 3 x RBW</td> </tr> <tr> <td>Span</td> <td>At least 2 x Operating Channel width</td> <td>Span should be large enough to include all major components of the signal and its side bands</td> </tr> <tr> <td>Detector Mode</td> <td>RMS</td> <td></td> </tr> <tr> <td>Trace</td> <td>Max hold</td> <td></td> </tr> </tbody> </table>	Setting	Value	Notes	Centre frequency	The nominal Operating Frequency	The highest or lowest Operating Frequency as declared by the manufacturer	RBW	1 % to 3 % of OCW without being below 100 Hz		VBW	3 x RBW	Nearest available analyser setting to 3 x RBW	Span	At least 2 x Operating Channel width	Span should be large enough to include all major components of the signal and its side bands	Detector Mode	RMS		Trace	Max hold	
Setting	Value	Notes																				
Centre frequency	The nominal Operating Frequency	The highest or lowest Operating Frequency as declared by the manufacturer																				
RBW	1 % to 3 % of OCW without being below 100 Hz																					
VBW	3 x RBW	Nearest available analyser setting to 3 x RBW																				
Span	At least 2 x Operating Channel width	Span should be large enough to include all major components of the signal and its side bands																				
Detector Mode	RMS																					
Trace	Max hold																					
Limit:	<p>The Operating Channel shall be declared and shall reside entirely within the Operational Frequency Band.</p> <p>The Maximum Occupied Bandwidth at 99 % shall reside entirely within the Operating Channel defined by <math>F_{low}</math> and <math>F_{high}</math>.</p> <p>Note: For 865 MHz to 868 MHz FHSS equipment. The Maximum occupied bandwidth per hopping channel shall be less or equal to 50kHz. For 863 MHz to 870 MHz FHSS equipment. The Maximum occupied bandwidth per hopping channel shall be less or equal to 100kHz.</p> <p>Note: For 863 MHz to 869.2 MHz, the maximum occupied bandwidth is limited to 300kHz.</p>																					
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>																					
Test Procedure:	<p><b>Step 1:</b> Operation of the EUT shall be started, on the highest operating frequency as declared by the manufacturer, with the appropriate test signal. The signal attenuation shall be adjusted to ensure that the signal power envelope is sufficiently above the noise floor of the analyser to avoid the noise signals on either side of the power envelope being included in the measurement.</p> <p><b>Step 2:</b> When the trace is completed the peak value of the trace shall be located and the analyser marker placed on this peak.</p> <p><b>Step 3:</b> The 99 % occupied bandwidth function of the spectrum analyser shall be used to measure the occupied bandwidth of the signal.</p>																					
Measurement Record:	Uncertainty: $\pm 5\%$																					
Test Instruments:	Refer to section 6.0 for details																					
Test mode:	Refer to section 5.2 for details																					
Test results:	Pass																					

**Measurement Data**

Test condition	Channel	99% Occupied Bandwidth(kHz)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Limit	Result
NTNV	Lowest	127.67	863.037	-	Occupied Bandwidth limited to 300KHz, F <sub>low</sub> and F <sub>high</sub> shall reside entirely within the operating band	Pass
	Highest	127.55	-	869.975		
LTHV	Lowest	127.37	863.042	-		
	Highest	127.68	-	869.971		
LTLV	Lowest	127.56	863.033	-		
	Highest	127.47	-	869.979		
HTLV	Lowest	127.53	863.038	-		
	Highest	127.44	-	869.974		
HTHV	Lowest	127.58	863.045	-		
	Highest	127.46	-	869.969		

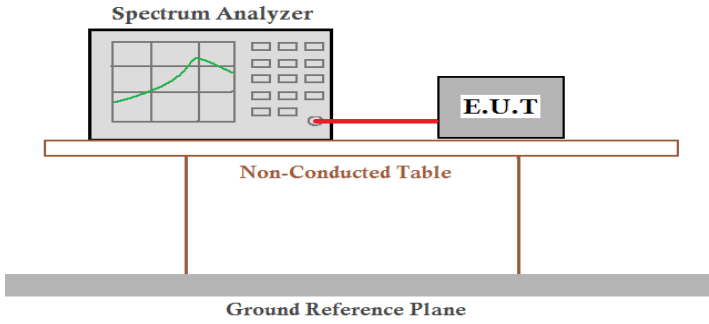
## 7.2.5 Frequency Error

Test Requirement:	ETSI EN 300 220-2 clause 4.3.3
Test Method:	ETSI EN 300 220-1 clause 5.7
Test setup:	
Test Procedure:	<p>Step 1: Operation of the EUT shall be started on the nominal frequency as declared by the manufacturer under extreme high temperature and extreme voltage conditions. The frequency of the unmodulated carrier shall be measured and noted.</p> <p>Step 2: Operation of the EUT shall be started on the nominal frequency as declared by the manufacturer under extreme low temperature and extreme voltage conditions.</p>
Measurement Record:	Uncertainty: $\pm 0.5\text{ppm}$
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Test conditions	Channel	Frequency(MHz)	A-N(KHz)	B-N(KHz)
N(NTNV)	Lowest	863.1MHz	-	-
	Highest	869.9MHz	-	-
B(HTHV)	Lowest	863.1MHz	0	0
	Highest	869.9MHz	0	0
A(LTLV)	Lowest	863.1MHz	0	0
	Highest	869.9MHz	0	0

## 7.2.6 TX Out Of Band Emissions

Test Requirement:	ETSI EN 300 220-2 clause 4.3.5																																																	
Test Method:	ETSI EN 300 220-1 clause 5.8.3																																																	
Receive setup:	<p style="text-align: center;"><b>Table 16: Test Parameters for Out Of Band for Operating Channel Measurement</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Spectrum Analyser Setting</th> <th style="text-align: center;">Value</th> <th style="text-align: center;">Notes</th> </tr> </thead> <tbody> <tr> <td>Centre frequency</td> <td>Operating Frequency</td> <td></td> </tr> <tr> <td>Span</td> <td>6 x Operating Channel width</td> <td></td> </tr> <tr> <td>RBW</td> <td>1 kHz (see note)</td> <td>Resolution bandwidth for Out Of Band domain measurements</td> </tr> <tr> <td>Detector Function</td> <td>RMS</td> <td></td> </tr> <tr> <td rowspan="2">Trace Mode</td> <td>Linear AVG</td> <td>Applies only for EUT generating D-M2 test signal. An appropriate number of samples should be averaged to give a stable reading</td> </tr> <tr> <td>Max Hold</td> <td>Applies only for EUT generating D-M2a or D-M3 test signal.</td> </tr> </tbody> </table> <p>NOTE: If the value of RBW used is different from <math>RBW_{REF}</math> in clause 5.8.2, use the bandwidth correction in clause 4.3.10.1.</p>	Spectrum Analyser Setting	Value	Notes	Centre frequency	Operating Frequency		Span	6 x Operating Channel width		RBW	1 kHz (see note)	Resolution bandwidth for Out Of Band domain measurements	Detector Function	RMS		Trace Mode	Linear AVG	Applies only for EUT generating D-M2 test signal. An appropriate number of samples should be averaged to give a stable reading	Max Hold	Applies only for EUT generating D-M2a or D-M3 test signal.																													
Spectrum Analyser Setting	Value	Notes																																																
Centre frequency	Operating Frequency																																																	
Span	6 x Operating Channel width																																																	
RBW	1 kHz (see note)	Resolution bandwidth for Out Of Band domain measurements																																																
Detector Function	RMS																																																	
Trace Mode	Linear AVG	Applies only for EUT generating D-M2 test signal. An appropriate number of samples should be averaged to give a stable reading																																																
	Max Hold	Applies only for EUT generating D-M2a or D-M3 test signal.																																																
Limit:	<p style="text-align: center;"><b>Table 15: Emission limits in the Out Of Band domains</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Domain</th> <th style="text-align: center;">Frequency Range</th> <th style="text-align: center;"><math>RBW_{REF}</math></th> <th style="text-align: center;">Max power limit</th> </tr> </thead> <tbody> <tr> <td rowspan="7">OOB limits applicable to Operational Frequency Band (See Figure 6)</td> <td><math>f \leq f_{low\_OFB} - 400\text{ KHz}</math></td> <td>10 kHz</td> <td>-36 dBm</td> </tr> <tr> <td><math>F_{low\_OFB} - 400\text{ KHz} \leq f \leq f_{low\_OFB} - 200\text{ KHz}</math></td> <td>1 kHz</td> <td>-36 dBm</td> </tr> <tr> <td><math>f_{low} - 200\text{ KHz} \leq f &lt; f_{low\_OFB}</math></td> <td>1 kHz</td> <td>See Figure 6</td> </tr> <tr> <td><math>f = f_{low\_OFB}</math></td> <td>1 kHz</td> <td>0 dBm</td> </tr> <tr> <td><math>f = f_{high\_OFB}</math></td> <td>1 kHz</td> <td>0 dBm</td> </tr> <tr> <td><math>F_{high\_OFB} &lt; f \leq f_{high\_OFB} + 200\text{ KHz}</math></td> <td>1 kHz</td> <td>See Figure 6</td> </tr> <tr> <td><math>F_{high\_OFB} + 200\text{ KHz} \leq f \leq f_{high\_OFB} + 400\text{ KHz}</math></td> <td>1 kHz</td> <td>-36 dBm</td> </tr> <tr> <td rowspan="6">OOB limits applicable to Operating Channel (See Figure 5)</td> <td><math>F_{high\_OFB} + 400\text{ KHz} \leq f</math></td> <td>10 kHz</td> <td>-36 dBm</td> </tr> <tr> <td><math>f = f_c - 2.5 \times OCV</math></td> <td>1 kHz</td> <td>-36 dBm</td> </tr> <tr> <td><math>f_c - 2.5 \times OCV \leq f \leq f_c - 0.5 \times OCV</math></td> <td>1 kHz</td> <td>See Figure 5</td> </tr> <tr> <td><math>f = f_c - 0.5 \times OCV</math></td> <td>1 kHz</td> <td>0 dBm</td> </tr> <tr> <td><math>f = f_c + 0.5 \times OCV</math></td> <td>1 kHz</td> <td>0 dBm</td> </tr> <tr> <td><math>f_c + 0.5 \times OCV \leq f \leq f_c + 2.5 \times OCV</math></td> <td>1 kHz</td> <td>See Figure 5</td> </tr> <tr> <td></td> <td><math>f = f_c + 2.5 \times OCV</math></td> <td>1 kHz</td> <td>-36 dBm</td> </tr> </tbody> </table> <p>NOTE: <math>f</math> is the measurement frequency.  <math>f_c</math> is the Operating Frequency.  <math>F_{low\_OFB}</math> is the lower edge of the Operational Frequency Band.  <math>F_{high\_OFB}</math> is the upper edge of the Operational Frequency Band.  <math>OCW</math> is the operating channel bandwidth.</p>	Domain	Frequency Range	$RBW_{REF}$	Max power limit	OOB limits applicable to Operational Frequency Band (See Figure 6)	$f \leq f_{low\_OFB} - 400\text{ KHz}$	10 kHz	-36 dBm	$F_{low\_OFB} - 400\text{ KHz} \leq f \leq f_{low\_OFB} - 200\text{ KHz}$	1 kHz	-36 dBm	$f_{low} - 200\text{ KHz} \leq f < f_{low\_OFB}$	1 kHz	See Figure 6	$f = f_{low\_OFB}$	1 kHz	0 dBm	$f = f_{high\_OFB}$	1 kHz	0 dBm	$F_{high\_OFB} < f \leq f_{high\_OFB} + 200\text{ KHz}$	1 kHz	See Figure 6	$F_{high\_OFB} + 200\text{ KHz} \leq f \leq f_{high\_OFB} + 400\text{ KHz}$	1 kHz	-36 dBm	OOB limits applicable to Operating Channel (See Figure 5)	$F_{high\_OFB} + 400\text{ KHz} \leq f$	10 kHz	-36 dBm	$f = f_c - 2.5 \times OCV$	1 kHz	-36 dBm	$f_c - 2.5 \times OCV \leq f \leq f_c - 0.5 \times OCV$	1 kHz	See Figure 5	$f = f_c - 0.5 \times OCV$	1 kHz	0 dBm	$f = f_c + 0.5 \times OCV$	1 kHz	0 dBm	$f_c + 0.5 \times OCV \leq f \leq f_c + 2.5 \times OCV$	1 kHz	See Figure 5		$f = f_c + 2.5 \times OCV$	1 kHz	-36 dBm
Domain	Frequency Range	$RBW_{REF}$	Max power limit																																															
OOB limits applicable to Operational Frequency Band (See Figure 6)	$f \leq f_{low\_OFB} - 400\text{ KHz}$	10 kHz	-36 dBm																																															
	$F_{low\_OFB} - 400\text{ KHz} \leq f \leq f_{low\_OFB} - 200\text{ KHz}$	1 kHz	-36 dBm																																															
	$f_{low} - 200\text{ KHz} \leq f < f_{low\_OFB}$	1 kHz	See Figure 6																																															
	$f = f_{low\_OFB}$	1 kHz	0 dBm																																															
	$f = f_{high\_OFB}$	1 kHz	0 dBm																																															
	$F_{high\_OFB} < f \leq f_{high\_OFB} + 200\text{ KHz}$	1 kHz	See Figure 6																																															
	$F_{high\_OFB} + 200\text{ KHz} \leq f \leq f_{high\_OFB} + 400\text{ KHz}$	1 kHz	-36 dBm																																															
OOB limits applicable to Operating Channel (See Figure 5)	$F_{high\_OFB} + 400\text{ KHz} \leq f$	10 kHz	-36 dBm																																															
	$f = f_c - 2.5 \times OCV$	1 kHz	-36 dBm																																															
	$f_c - 2.5 \times OCV \leq f \leq f_c - 0.5 \times OCV$	1 kHz	See Figure 5																																															
	$f = f_c - 0.5 \times OCV$	1 kHz	0 dBm																																															
	$f = f_c + 0.5 \times OCV$	1 kHz	0 dBm																																															
	$f_c + 0.5 \times OCV \leq f \leq f_c + 2.5 \times OCV$	1 kHz	See Figure 5																																															
	$f = f_c + 2.5 \times OCV$	1 kHz	-36 dBm																																															
Test setup:	 <p style="text-align: center;">Spectrum Analyzer</p> <p style="text-align: center;">E.U.T</p> <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>																																																	
Test Procedure:	Refer to clause 5.8.3.4 of ETSI EN300220-1																																																	
Test Instruments:	Refer to section 6.0 for details																																																	
Test mode:	Refer to section 5.2 for details																																																	
Test results:	Pass																																																	

### Measurement Data



Lowest channel and Highest channel

Domain	Frequency Range	Result
OOB limits applicable to Operational Frequency Band	$f \leq \text{flow\_OFB} - 400 \text{ kHz}$	Pass
	$\text{Flow\_OFB} - 400 \text{ kHz} \leq f \leq \text{flow\_OFB} - 200 \text{ kHz}$	Pass
	$\text{flow} - 200 \text{ kHz} \leq f < \text{flow\_OFB}$	Pass
	$f = \text{flow\_OFB}$	Pass
	$f = \text{fhigh\_OFB}$	Pass
	$\text{Fhigh\_OFB} < f \leq \text{fhigh\_OFB} + 200 \text{ kHz}$	Pass
	$\text{Fhigh\_OFB} + 200 \text{ kHz} \leq f \leq \text{fhigh\_OFB} + 400 \text{ kHz}$	Pass
	$\text{Fhigh\_OFB} + 400 \text{ kHz} \leq f$	Pass
OOB limits applicable to Operating Channel	$f = f_c - 2.5 \times \text{OCW}$	Pass
	$f_c - 2,5 \times \text{OCW} \leq f \leq f_c - 0,5 \times \text{OCW}$	Pass
	$f = f_c - 0,5 \times \text{OCW}$	Pass
	$f = f_c + 0,5 \times \text{OCW}$	Pass
	$f_c + 0,5 \times \text{OCW} \leq f \leq f_c + 2,5 \times \text{OCW}$	Pass
	$f = f_c + 2,5 \times \text{OCW}$	Pass

## 7.2.7 Transient power

Test Requirement:	ETSI EN 300 220-2 Clause 4.3.6																																							
Test Method:	ETSI EN 300 220-1 Clause 5.10																																							
Limit:	<p style="text-align: center;"><b>Table 23: Transmitter Transient Power limits</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Absolute offset from centre frequency</th> <th style="text-align: center;">RBW<sub>REF</sub></th> <th style="text-align: center;">Peak power limit applicable at measurement points</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">≤ 400 kHz</td> <td style="text-align: center;">1 kHz</td> <td style="text-align: center;">0 dBm</td> </tr> <tr> <td style="text-align: center;">&gt; 400 kHz</td> <td style="text-align: center;">1 kHz</td> <td style="text-align: center;">-27 dBm</td> </tr> </tbody> </table>	Absolute offset from centre frequency	RBW <sub>REF</sub>	Peak power limit applicable at measurement points	≤ 400 kHz	1 kHz	0 dBm	> 400 kHz	1 kHz	-27 dBm																														
Absolute offset from centre frequency	RBW <sub>REF</sub>	Peak power limit applicable at measurement points																																						
≤ 400 kHz	1 kHz	0 dBm																																						
> 400 kHz	1 kHz	-27 dBm																																						
Test procedure:	<p>The output of the EUT shall be connected to a spectrum analyser or equivalent measuring equipment.</p> <p>The measurement shall be undertaken in zero span mode. The analyser's centre frequency shall be set to an offset from the operating centre frequency. These offset values and their corresponding RBW configurations are listed in Table 24.</p> <p style="text-align: center;"><b>Table 24: RBW for Transient Measurement</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Measurement points: offset from centre frequency</th> <th style="text-align: center;">Analyser RBW</th> <th style="text-align: center;">RBW<sub>REF</sub></th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">-0,5 x OCW - 3 kHz 0,5 x OCW + 3 kHz Not applicable for OCW &lt; 25 kHz</td> <td style="text-align: center;">1 kHz</td> <td style="text-align: center;">1kHz</td> </tr> <tr> <td style="text-align: center;">±12,5 kHz or ±OCW whichever is the greater</td> <td style="text-align: center;">Max (RBW pattern 1, 3, 10 kHz) ≤ Offset frequency/6 (see note)</td> <td style="text-align: center;">1 kHz</td> </tr> <tr> <td style="text-align: center;">-0,5 x OCW - 400 kHz 0,5 x OCW + 400 kHz</td> <td style="text-align: center;">100 kHz</td> <td style="text-align: center;">1 kHz</td> </tr> <tr> <td style="text-align: center;">-0,5 x OCW -1 200 kHz 0,5 x OCW + 1 200 kHz</td> <td style="text-align: center;">300 kHz</td> <td style="text-align: center;">1 kHz</td> </tr> </tbody> </table> <p>NOTE: Max (RBW pattern 1, 3, 10 kHz) means the maximum bandwidth that falls into the commonly implemented 1, 3, 10 kHz RBW filter bandwidth incremental pattern of spectrum analysers. EXAMPLE: If OCW is 25 kHz then the RBW value corresponding to one OCW offset frequency is 3 kHz. The rest of the analyser settings are listed in Table 25, and if OCW is 250 kHz then the RBW value corresponding to one OCW offset frequency is 30 kHz.</p> <p style="text-align: center;"><b>Table 25: Parameters for Transient Measurement</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Spectrum Analyser Setting</th> <th style="text-align: center;">Value</th> <th style="text-align: center;">Notes</th> </tr> </thead> <tbody> <tr> <td>VBW/RBW</td> <td style="text-align: center;">10</td> <td>At higher RBW values VBW may be clipped to its maximum value</td> </tr> <tr> <td>Sweep time</td> <td style="text-align: center;">500 ms</td> <td></td> </tr> <tr> <td>RBW filter</td> <td style="text-align: center;">Gaussian</td> <td></td> </tr> <tr> <td>Trace Detector Function</td> <td style="text-align: center;">RMS</td> <td></td> </tr> <tr> <td>Trace Mode</td> <td style="text-align: center;">Max hold</td> <td></td> </tr> <tr> <td>Sweep points</td> <td style="text-align: center;">501</td> <td></td> </tr> <tr> <td>Measurement mode</td> <td style="text-align: center;">Continuous sweep</td> <td></td> </tr> </tbody> </table> <p>NOTE: The ratio between the number of sweep points and the sweep time shall be the same ratio as above if different number of sweep points is used.</p> <p>The used modulation shall be D-M3. The analyser shall be set to the settings of Table 25 and a measurement shall be started for each offset frequency. The EUT shall transmit at least five D-M3 test signal. The peak value shall be recorded and the measurement shall be repeated at each offset frequency mentioned in Table 24.</p> <p>The recorded power values shall be converted to power values measured in RBW<sub>REF</sub> by the formula in clause 4.3.10.1.</p>	Measurement points: offset from centre frequency	Analyser RBW	RBW <sub>REF</sub>	-0,5 x OCW - 3 kHz 0,5 x OCW + 3 kHz Not applicable for OCW < 25 kHz	1 kHz	1kHz	±12,5 kHz or ±OCW whichever is the greater	Max (RBW pattern 1, 3, 10 kHz) ≤ Offset frequency/6 (see note)	1 kHz	-0,5 x OCW - 400 kHz 0,5 x OCW + 400 kHz	100 kHz	1 kHz	-0,5 x OCW -1 200 kHz 0,5 x OCW + 1 200 kHz	300 kHz	1 kHz	Spectrum Analyser Setting	Value	Notes	VBW/RBW	10	At higher RBW values VBW may be clipped to its maximum value	Sweep time	500 ms		RBW filter	Gaussian		Trace Detector Function	RMS		Trace Mode	Max hold		Sweep points	501		Measurement mode	Continuous sweep	
Measurement points: offset from centre frequency	Analyser RBW	RBW <sub>REF</sub>																																						
-0,5 x OCW - 3 kHz 0,5 x OCW + 3 kHz Not applicable for OCW < 25 kHz	1 kHz	1kHz																																						
±12,5 kHz or ±OCW whichever is the greater	Max (RBW pattern 1, 3, 10 kHz) ≤ Offset frequency/6 (see note)	1 kHz																																						
-0,5 x OCW - 400 kHz 0,5 x OCW + 400 kHz	100 kHz	1 kHz																																						
-0,5 x OCW -1 200 kHz 0,5 x OCW + 1 200 kHz	300 kHz	1 kHz																																						
Spectrum Analyser Setting	Value	Notes																																						
VBW/RBW	10	At higher RBW values VBW may be clipped to its maximum value																																						
Sweep time	500 ms																																							
RBW filter	Gaussian																																							
Trace Detector Function	RMS																																							
Trace Mode	Max hold																																							
Sweep points	501																																							
Measurement mode	Continuous sweep																																							
Measurement Record:	Uncertainty: ± 1.5dB																																							
Test Instruments:	Refer to section 6.0 for details																																							
Test mode:	Refer to section 5.2 for details																																							
Test results:	Pass																																							

## Measurement Data

Lowest channel

Frequency offset	Peak Power Level (dBm)	Limit (dBm)	Result
$F_c - 0.5 * OCW - 1200kHz$	-47.35	-27	Pass
$F_c - 0.5 * OCW - 400kHz$	-42.42	-27	
$F_c - OCW$	-36.27	0	
$F_c - 0.5 * OCW - 3kHz$	-47.47	0	
$F_c + 0.5 * OCW + 3kHz$	-42.38	0	
$F_c + OCW$	-38.44	0	
$F_c + 0.5 * OCW + 400kHz$	-42.72	-27	
$F_c + 0.5 * OCW + 1200kHz$	-47.49	-27	

Middle channel

Frequency offset	Peak Power Level (dBm)	Limit (dBm)	Result
$F_c - 0.5 * OCW - 1200kHz$	-47.38	-27	Pass
$F_c - 0.5 * OCW - 400kHz$	-42.44	-27	
$F_c - OCW$	-36.27	0	
$F_c - 0.5 * OCW - 3kHz$	-47.38	0	
$F_c + 0.5 * OCW + 3kHz$	-42.44	0	
$F_c + OCW$	-38.32	0	
$F_c + 0.5 * OCW + 400kHz$	-42.38	-27	
$F_c + 0.5 * OCW + 1200kHz$	-47.49	-27	

Highest channel

Frequency offset	Peak Power Level (dBm)	Limit (dBm)	Result
$F_c - 0.5 * OCW - 1200kHz$	-47.42	-27	Pass
$F_c - 0.5 * OCW - 400kHz$	-42.57	-27	
$F_c - OCW$	-36.91	0	
$F_c - 0.5 * OCW - 3kHz$	-47.38	0	
$F_c + 0.5 * OCW + 3kHz$	-42.51	0	
$F_c + OCW$	-38.33	0	
$F_c + 0.5 * OCW + 400kHz$	-42.38	-27	
$F_c + 0.5 * OCW + 1200kHz$	-47.51	-27	

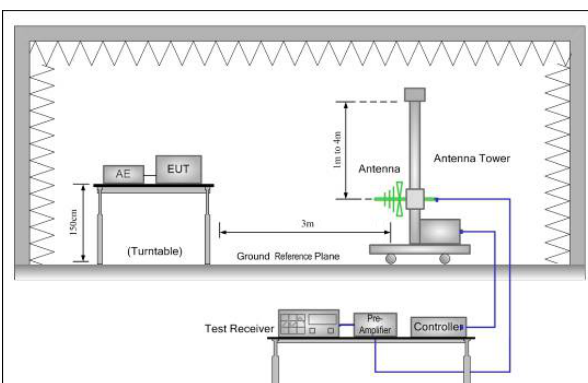
## 7.2.8 Adjacent Channel Power

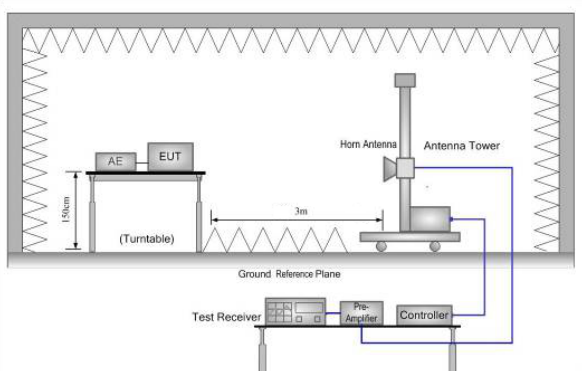
Test Requirement:	ETSI EN 300 220-2 Clause 4.3.7.2																				
Test Method:	ETSI EN 300 220-1 Clause 5.11																				
Limit:	<p align="center"><b>Table 26: Adjacent channel power limits for transmitters with OCW ≤ 25 kHz</b></p> <table border="1"> <thead> <tr> <th></th> <th></th> <th>Adjacent Channel power integrated over 0,7 x OCW</th> <th>Alternate Adjacent Channel power integrated over 0,7 x OCW</th> </tr> </thead> <tbody> <tr> <td rowspan="2">OCW &lt; 20 kHz</td> <td>Normal test conditions</td> <td>-20 dBm</td> <td>-20 dBm</td> </tr> <tr> <td>Extreme test conditions</td> <td>-15 dBm</td> <td>-20 dBm</td> </tr> <tr> <td rowspan="2">OCW ≥ 20 kHz</td> <td>Normal test conditions</td> <td>-37 dBm</td> <td>-40 dBm</td> </tr> <tr> <td>Extreme test conditions</td> <td>-32 dBm</td> <td>-37 dBm</td> </tr> </tbody> </table>					Adjacent Channel power integrated over 0,7 x OCW	Alternate Adjacent Channel power integrated over 0,7 x OCW	OCW < 20 kHz	Normal test conditions	-20 dBm	-20 dBm	Extreme test conditions	-15 dBm	-20 dBm	OCW ≥ 20 kHz	Normal test conditions	-37 dBm	-40 dBm	Extreme test conditions	-32 dBm	-37 dBm
		Adjacent Channel power integrated over 0,7 x OCW	Alternate Adjacent Channel power integrated over 0,7 x OCW																		
OCW < 20 kHz	Normal test conditions	-20 dBm	-20 dBm																		
	Extreme test conditions	-15 dBm	-20 dBm																		
OCW ≥ 20 kHz	Normal test conditions	-37 dBm	-40 dBm																		
	Extreme test conditions	-32 dBm	-37 dBm																		
Test procedure:	Center frequency: The nominal operating frequency RBW=100Hz VBW>=3*RBW Span:>=5*operating channel width Trace detector: RMS Trace mode: Max hold																				
Measurement Record:	Uncertainty: 0.65dB																				
Test Instruments:	Refer to section 6.0 for details																				
Test mode:	Refer to section 5.2 for details																				
Test results:	N/A (Not applicable for OCW ≥25KHz)																				

## 7.2.9 Adaptive Power Control

Only used in 870,000 MHz to 875,800 MHz band equipment.
---

## 7.2.10 Transmit spurious emissions

Test Requirement:	ETSI EN 300 220-2 Clause 4.2.2																									
Test Method:	ETSI EN 300 220-1 Clause 5.9																									
Receiver setup:	<p style="text-align: center;"><b>Table 20: Parameters for TX Spurious Radiations Measurement</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Operating Mode</th> <th style="width: 40%;">Frequency Range</th> <th style="width: 30%;">RBW<sub>REF</sub> (see note 2)</th> </tr> </thead> <tbody> <tr> <td rowspan="8" style="text-align: center;">Transmit mode</td> <td><math>9 \text{ kHz} \leq f &lt; 150 \text{ kHz}</math></td> <td>1 kHz</td> </tr> <tr> <td><math>150 \text{ kHz} \leq f &lt; 30 \text{ MHz}</math></td> <td>10 kHz</td> </tr> <tr> <td><math>30 \text{ MHz} \leq f &lt; f_c - m</math></td> <td>100 kHz</td> </tr> <tr> <td><math>f_c - m \leq f &lt; f_c - n</math></td> <td>10 kHz</td> </tr> <tr> <td><math>f_c - n \leq f &lt; f_c - p</math></td> <td>1 kHz</td> </tr> <tr> <td><math>f_c + p &lt; f \leq f_c + n</math></td> <td>1 kHz</td> </tr> <tr> <td><math>f_c + n &lt; f \leq f_c + m</math></td> <td>10 kHz</td> </tr> <tr> <td><math>f_c + m &lt; f \leq 1 \text{ GHz}</math></td> <td>100 kHz</td> </tr> <tr> <td></td> <td><math>1 \text{ GHz} &lt; f \leq 6 \text{ GHz}</math></td> <td>1 MHz</td> </tr> </tbody> </table> <p>NOTE 1: f is the measurement frequency.  <math>f_c</math> is the Operating Frequency.  m is 10 x OCW or 500 kHz, whichever is the greater.  n is 4 x OCW or 100 kHz, whichever is the greater.  p is 2,5 x OCW.</p> <p>NOTE 2: If the value of RBW used for measurement is different from RBW<sub>REF</sub>, use bandwidth correction from clause 4.3.10.1.</p>			Operating Mode	Frequency Range	RBW <sub>REF</sub> (see note 2)	Transmit mode	$9 \text{ kHz} \leq f < 150 \text{ kHz}$	1 kHz	$150 \text{ kHz} \leq f < 30 \text{ MHz}$	10 kHz	$30 \text{ MHz} \leq f < f_c - m$	100 kHz	$f_c - m \leq f < f_c - n$	10 kHz	$f_c - n \leq f < f_c - p$	1 kHz	$f_c + p < f \leq f_c + n$	1 kHz	$f_c + n < f \leq f_c + m$	10 kHz	$f_c + m < f \leq 1 \text{ GHz}$	100 kHz		$1 \text{ GHz} < f \leq 6 \text{ GHz}$	1 MHz
Operating Mode	Frequency Range	RBW <sub>REF</sub> (see note 2)																								
Transmit mode	$9 \text{ kHz} \leq f < 150 \text{ kHz}$	1 kHz																								
	$150 \text{ kHz} \leq f < 30 \text{ MHz}$	10 kHz																								
	$30 \text{ MHz} \leq f < f_c - m$	100 kHz																								
	$f_c - m \leq f < f_c - n$	10 kHz																								
	$f_c - n \leq f < f_c - p$	1 kHz																								
	$f_c + p < f \leq f_c + n$	1 kHz																								
	$f_c + n < f \leq f_c + m$	10 kHz																								
	$f_c + m < f \leq 1 \text{ GHz}$	100 kHz																								
	$1 \text{ GHz} < f \leq 6 \text{ GHz}$	1 MHz																								
Test Frequency range:	25MHz to 6GHz																									
Limit:	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 30%;">Frequency</th> <th style="width: 30%;">Limit(operation)</th> <th style="width: 40%;">Limit(standby)</th> </tr> </thead> <tbody> <tr> <td>47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz</td> <td style="text-align: center;">4nW(-54dBm)</td> <td style="text-align: center;">2nW(-57dBm)</td> </tr> <tr> <td>Other frequencies below 1000 MHz</td> <td style="text-align: center;">250nW(-36dBm)</td> <td style="text-align: center;">2nW(-57dBm)</td> </tr> <tr> <td>Above 1000 MHz</td> <td style="text-align: center;">1uW(-30dBm)</td> <td style="text-align: center;">20nW(-47dBm)</td> </tr> </tbody> </table>	Frequency	Limit(operation)	Limit(standby)	47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	4nW(-54dBm)	2nW(-57dBm)	Other frequencies below 1000 MHz	250nW(-36dBm)	2nW(-57dBm)	Above 1000 MHz	1uW(-30dBm)	20nW(-47dBm)													
Frequency	Limit(operation)	Limit(standby)																								
47 MHz to 74 MHz 87.5 MHz to 118 MHz 174 MHz to 230 MHz 470 MHz to 790 MHz	4nW(-54dBm)	2nW(-57dBm)																								
Other frequencies below 1000 MHz	250nW(-36dBm)	2nW(-57dBm)																								
Above 1000 MHz	1uW(-30dBm)	20nW(-47dBm)																								
Test setup:	<p>Below 1GHz</p>  <p>Above 1GHz</p>																									

	
<p>Test procedure:</p>	<p>Substitution method was performed to determine the actual ERP emission levels of the EUT.</p> <p>The following test procedure as below:</p> <p><b>Below 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. On the test site as test setup graph above, the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider.</li> <li>2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver.</li> <li>3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.</li> <li>4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.</li> <li>5. Repeat step 4 for test frequency with the test antenna polarized horizontally.</li> <li>6. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At the lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.</li> <li>7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.</li> <li>8. Repeat step 7 with both antennas horizontally polarized for each test frequency.</li> <li>9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in</li> </ol>

	<p>the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:</p> $\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}$ <p>where:</p> <p>Pg is the generator output power into the substitution antenna.</p> <p><b>Above 1GHz:</b></p> <p>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber, and the test antenna do not need to raise from 1 to 4m, just test in 1.5m height.</p>
Measurement Record:	Uncertainty: 4.64dB
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

## Measurement Data

Lowest channel

Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result	
	polarization	Level(dBm)			
761.11	Vertical	-79.24	-54.00	Pass	
108.93	V	-92.20	-54.00		
1490.00	V	-59.85	-30.00		
2700.00	V	-59.09	-30.00		
4050.00	V	-56.99	-30.00		
5555.00	V	-51.46	-30.00		
117.71	Horizontal	-92.89	-54.00		
614.51	H	-82.53	-54.00		
1875.00	H	-59.32	-30.00		
3235.00	H	-56.79	-30.00		
4475.00	H	-56.94	-30.00		
5790.00	H	-51.19	-30.00		
<b>Tx in standby Mode</b>					
N/A: Not applicable, since the spurious emission of the EUT is too weak to be detected.(≤-70dBm)					

Middle channel

Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result	
	polarization	Level(dBm)			
186.67	Vertical	-82.67	-54.00	Pass	
701.78	V	-83.98	-54.00		
1645.00	V	-59.08	-30.00		
2395.00	V	-58.66	-30.00		
3565.00	V	-56.32	-30.00		
5690.00	V	-51.45	-30.00		
198.75	Horizontal	-83.55	-54.00		
558.31	H	-84.20	-54.00		
1230.00	H	-58.65	-30.00		
2165.00	H	-59.13	-30.00		
3100.00	H	-58.09	-30.00		
5435.00	H	-53.65	-30.00		
<b>Tx in standby Mode</b>					
N/A: Not applicable, since the spurious emission of the EUT is too weak to be detected.(≤-70dBm)					

Highest channel

Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result	
	polarization	Level(dBm)			
54.45	Vertical	-81.86	-54.00	Pass	
168.57	V	-82.98	-36.00		
1675.00	V	-58.99	-30.00		
2584.00	V	-57.86	-30.00		
3384.00	V	-55.94	-30.00		
5770.00	V	-52.38	-30.00		
128.71	Horizontal	-83.77	-36.00		
528.95	H	-84.62	-54.00		
1247.00	H	-58.34	-30.00		
2865.00	H	-58.76	-30.00		
3750.00	H	-59.45	-30.00		
5975.00	H	-56.44	-30.00		
<b>Tx in standby Mode</b>					
N/A: Not applicable, since the spurious emission of the EUT is too weak to be detected.(≤-70dBm)					



## 7.3 Receiver Requirements

Receiver Classification, Table 1 of ETSI EN 300 220-1.		
Rx Class	Relevant Rx Clauses	Risk assessment of Rx performance
1	5.15, 5.16, 5.17, 5.18, 5.19	Category 1 is a high performance level of receiver. In particular to be used where the operation of a SRD may have inherent safety of human life implications.
1.5	5.18	Category 1.5 is an improved performance level of receiver category 2.
2	5.18	Category 2 is standard performance level of receiver.
3	5.18	Category 3 is a low performance level of receiver. Manufacturers have to be aware that category 3 receivers are not able to work properly in case of coexistence with some services such as a mobile radio service in adjacent bands. The manufacturer shall provide another mean to overcome the weakness of the radio link or accept the failure.
NOTE: The receiver category should be stated in both the test report and in the user's manual for the equipment. Receiver category 3 will be withdrawn after December 31 <sup>st</sup> , 2018.		
<b>The EUT (Receiver part) belong to Category 2 with no Polite spectrum access function.</b>		

### 7.3.1 Receiver sensitivity

Not applicable, since the test applied to Polite spectrum access equipment.

### 7.3.2 Clear Channel Assessment threshold

Not applicable, since the test applied to Polite spectrum access equipment.

### 7.3.3 Not applicable, since the test applied to Polite spectrum access equipment.

Not applicable, since the test applied to Polite spectrum access equipment.

### 7.3.4 Adaptive Frequency Agility

Not applicable, since the test applied to AFA quipment.

### 7.3.5 Adjacent channel selectivity

Not applicable, since the test applied to Category 1 equipment.

### 7.3.6 Receiver saturation at Adjacent Channel

Not applicable, since the test applied to Category 1 equipment.

### 7.3.7 Spurious response rejection

Not applicable, since the test applied to Category 1 equipment.

### 7.3.8 Behaviour at high wanted signal level

Not applicable, since the test applied to Category 1 equipment.

### 7.3.9 Bi-Directional Operation Verification

Not applicable, since this product is not support Bi-Directional operation function.

### 7.3.10 Blocking

Test Requirement:	ETSI EN 300 220-2 Clause 4.4.2																																								
Test Method:	ETSI EN 300 220-1 clause 5.18																																								
Limit:	<p style="text-align: center;"><b>Table 43: Blocking level parameters for RX category 1</b></p> <table border="1"> <thead> <tr> <th>Requirement</th> <th>Limits</th> </tr> <tr> <th colspan="2" style="text-align: center;">Receiver category 1</th> </tr> </thead> <tbody> <tr> <td>Blocking at <math>\pm 2</math> MHz from Centre Frequency</td> <td><math>\geq -20</math> dBm</td> </tr> <tr> <td>Blocking at <math>\pm 10</math> MHz from Centre Frequency</td> <td><math>\geq -20</math> dBm</td> </tr> <tr> <td>Blocking at <math>\pm 5\%</math> of Centre Frequency or 15 MHz, whichever is the greater</td> <td><math>\geq -20</math> dBm</td> </tr> </tbody> </table> <p style="text-align: center;"><b>Table 42: Blocking level parameters for RX category 1.5</b></p> <table border="1"> <thead> <tr> <th>Requirement</th> <th>Limits</th> </tr> <tr> <th colspan="2" style="text-align: center;">Receiver category 1.5</th> </tr> </thead> <tbody> <tr> <td>Blocking at <math>\pm 2</math> MHz from OC edge <math>f_{high}</math> and <math>f_{low}</math></td> <td><math>\geq -43</math> dBm</td> </tr> <tr> <td>Blocking at <math>\pm 10</math> MHz from OC edge <math>f_{high}</math> and <math>f_{low}</math></td> <td><math>\geq -33</math> dBm</td> </tr> <tr> <td>Blocking at <math>\pm 5\%</math> of Centre Frequency or 15 MHz, whichever is the greater</td> <td><math>\geq -33</math> dBm</td> </tr> </tbody> </table> <p style="text-align: center;"><b>Table 41: Blocking level parameters for RX category 2</b></p> <table border="1"> <thead> <tr> <th>Requirement</th> <th>Limits</th> </tr> <tr> <th colspan="2" style="text-align: center;">Receiver category 2</th> </tr> </thead> <tbody> <tr> <td>Blocking at <math>\pm 2</math> MHz from OC edge <math>f_{high}</math> and <math>f_{low}</math></td> <td><math>\geq -69</math> dBm</td> </tr> <tr> <td>Blocking at <math>\pm 10</math> MHz from OC edge <math>f_{high}</math> and <math>f_{low}</math></td> <td><math>\geq -44</math> dBm</td> </tr> <tr> <td>Blocking at <math>\pm 5\%</math> of Centre Frequency or 15 MHz, whichever is the greater</td> <td><math>\geq -44</math> dBm</td> </tr> </tbody> </table> <p style="text-align: center;"><b>Table 40: Blocking level parameters for RX category 3</b></p> <table border="1"> <thead> <tr> <th>Requirement</th> <th>Limits</th> </tr> <tr> <th colspan="2" style="text-align: center;">Receiver category 3</th> </tr> </thead> <tbody> <tr> <td>Blocking at <math>\pm 2</math> MHz from OC edge <math>f_{high}</math> and <math>f_{low}</math></td> <td><math>\geq -80</math> dBm</td> </tr> <tr> <td>Blocking at <math>\pm 10</math> MHz from OC edge <math>f_{high}</math> and <math>f_{low}</math></td> <td><math>\geq -60</math> dBm</td> </tr> <tr> <td>Blocking at <math>\pm 5\%</math> of Centre Frequency or 15 MHz, whichever is the greater</td> <td><math>\geq -60</math> dBm</td> </tr> </tbody> </table> <p>A = <math>10 \log (BW_{kHz} / 16 \text{ kHz})</math> BW is the receiver bandwidth</p>	Requirement	Limits	Receiver category 1		Blocking at $\pm 2$ MHz from Centre Frequency	$\geq -20$ dBm	Blocking at $\pm 10$ MHz from Centre Frequency	$\geq -20$ dBm	Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater	$\geq -20$ dBm	Requirement	Limits	Receiver category 1.5		Blocking at $\pm 2$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -43$ dBm	Blocking at $\pm 10$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -33$ dBm	Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater	$\geq -33$ dBm	Requirement	Limits	Receiver category 2		Blocking at $\pm 2$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -69$ dBm	Blocking at $\pm 10$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -44$ dBm	Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater	$\geq -44$ dBm	Requirement	Limits	Receiver category 3		Blocking at $\pm 2$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -80$ dBm	Blocking at $\pm 10$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -60$ dBm	Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater	$\geq -60$ dBm
Requirement	Limits																																								
Receiver category 1																																									
Blocking at $\pm 2$ MHz from Centre Frequency	$\geq -20$ dBm																																								
Blocking at $\pm 10$ MHz from Centre Frequency	$\geq -20$ dBm																																								
Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater	$\geq -20$ dBm																																								
Requirement	Limits																																								
Receiver category 1.5																																									
Blocking at $\pm 2$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -43$ dBm																																								
Blocking at $\pm 10$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -33$ dBm																																								
Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater	$\geq -33$ dBm																																								
Requirement	Limits																																								
Receiver category 2																																									
Blocking at $\pm 2$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -69$ dBm																																								
Blocking at $\pm 10$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -44$ dBm																																								
Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater	$\geq -44$ dBm																																								
Requirement	Limits																																								
Receiver category 3																																									
Blocking at $\pm 2$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -80$ dBm																																								
Blocking at $\pm 10$ MHz from OC edge $f_{high}$ and $f_{low}$	$\geq -60$ dBm																																								
Blocking at $\pm 5\%$ of Centre Frequency or 15 MHz, whichever is the greater	$\geq -60$ dBm																																								
Test setup:	<pre> graph LR     A[Signal Generator A] --- C[Combiner]     B[Signal Generator B] --- C     C --- EUT[EUT]         </pre>																																								
Test procedure:	<ol style="list-style-type: none"> <li>Two signal generators A and B shall be connected to the receiver via a combining network to the receiver antennaconnector.</li> <li>Signal generator A shall be at the nominal frequency of the receiver, with normal modulation of the wanted signal. Signal generator B shall be unmodulated.</li> <li>Measurements shall be carried out at frequencies of the unwanted signal at approximately <math>\pm 2</math> MHz and <math>\pm 10</math> MHz, avoiding those frequencies at which spurious responses occur.</li> <li>Initially signal generator B shall be switched off and using signal generator A the level which still gives sufficient response shall be established, however, the level at the receiver input shall not be adjusted below the sensitivity limit given in clause 8.1.4. The output level of generator A shall then be increased by 3 dB.</li> <li>Signal generator B is then switched on and adjusted until the wanted criteria (see clause 8.1.1) is just exceeded. With signal generator B settings unchanged the power into the receiver is measured by replacing the receiver with a power meter or spectrum analyzer. This level shall be</li> </ol>																																								

	<p>recorded. Alternatively, equipment having a dedicated or integral antenna may use a radiated measurement setup. For this, a test site from clause A.1 shall be selected and the requirements from clauses A.2 and A.3 apply.</p> <p>6. Signal generators A and B together with a combiner shall be placed outside the anechoic chamber and a TX test antenna shall be placed with the EUT's antenna polarisation. The EUT shall be placed at the location of the turntable at the orientation of the most sensitive position. Generator A shall be set in order to reach the EUT sensitivity limit +3 dB.</p> <p>7. The procedure shall be the same as for the conducted measurement. Blocking is the difference between signal generator B and signal generator A levels.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

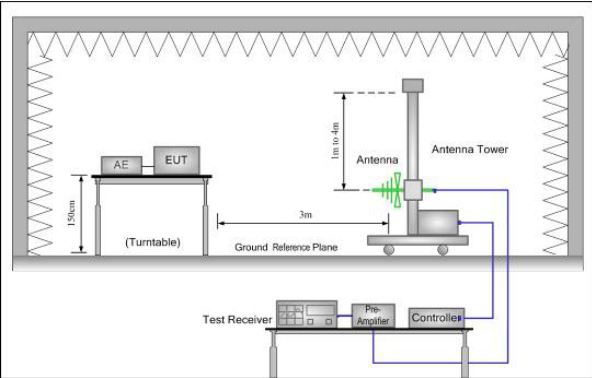
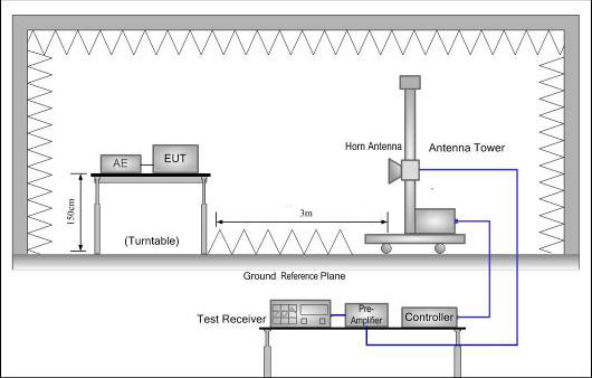
**Measurement data:**

Middle channel

Frequency offset	Signal generator A level (dB)	Blocking level (dB)	Limit (dB)	Result
Flow-5% of Fc	-98.10	-31	-44.00	Pass
Flow-10MHz	-98.10	-36	-44.00	
Flow-2MHz	-98.10	-46	-69.00	
FHigh+2MHz	-98.10	-47	-69.00	
FHigh+10MHz	-98.10	-37	-44.00	
FHigh+5% of Fc	-98.10	-30	-44.00	

Remark: The provider declared that the receiver bandwidth is 200kHz.

### 7.3.11 Spurious emissions

Test Requirement:	ETSI EN 300 220-2 Clause 4.2.2																								
Test Method:	ETSI EN 300 220-1 Clause 5.9.1.2																								
Receiver setup:	<p align="center"><b>Table 20: Parameters for TX Spurious Radiations Measurement</b></p> <table border="1"> <thead> <tr> <th>Operating Mode</th> <th>Frequency Range</th> <th>RBW<sub>REF</sub> (see note 2)</th> </tr> </thead> <tbody> <tr> <td rowspan="8">Transmit mode</td> <td><math>9 \text{ kHz} \leq f &lt; 150 \text{ kHz}</math></td> <td>1 kHz</td> </tr> <tr> <td><math>150 \text{ kHz} \leq f &lt; 30 \text{ MHz}</math></td> <td>10 kHz</td> </tr> <tr> <td><math>30 \text{ MHz} \leq f &lt; f_c - m</math></td> <td>100 kHz</td> </tr> <tr> <td><math>f_c - m \leq f &lt; f_c - n</math></td> <td>10 kHz</td> </tr> <tr> <td><math>f_c - n \leq f &lt; f_c - p</math></td> <td>1 kHz</td> </tr> <tr> <td><math>f_c + p &lt; f \leq f_c + n</math></td> <td>1 kHz</td> </tr> <tr> <td><math>f_c + n &lt; f \leq f_c + m</math></td> <td>10 kHz</td> </tr> <tr> <td><math>f_c + m &lt; f \leq 1 \text{ GHz}</math></td> <td>100 kHz</td> </tr> <tr> <td></td> <td><math>1 \text{ GHz} &lt; f \leq 6 \text{ GHz}</math></td> <td>1 MHz</td> </tr> </tbody> </table> <p>NOTE 1: f is the measurement frequency.  <math>f_c</math> is the Operating Frequency.  m is 10 x OCW or 500 kHz, whichever is the greater.  n is 4 x OCW or 100 kHz, whichever is the greater.  p is 2,5 x OCW.</p> <p>NOTE 2: If the value of RBW used for measurement is different from RBW<sub>REF</sub>, use bandwidth correction from clause 4.3.10.1.</p>		Operating Mode	Frequency Range	RBW <sub>REF</sub> (see note 2)	Transmit mode	$9 \text{ kHz} \leq f < 150 \text{ kHz}$	1 kHz	$150 \text{ kHz} \leq f < 30 \text{ MHz}$	10 kHz	$30 \text{ MHz} \leq f < f_c - m$	100 kHz	$f_c - m \leq f < f_c - n$	10 kHz	$f_c - n \leq f < f_c - p$	1 kHz	$f_c + p < f \leq f_c + n$	1 kHz	$f_c + n < f \leq f_c + m$	10 kHz	$f_c + m < f \leq 1 \text{ GHz}$	100 kHz		$1 \text{ GHz} < f \leq 6 \text{ GHz}$	1 MHz
Operating Mode	Frequency Range	RBW <sub>REF</sub> (see note 2)																							
Transmit mode	$9 \text{ kHz} \leq f < 150 \text{ kHz}$	1 kHz																							
	$150 \text{ kHz} \leq f < 30 \text{ MHz}$	10 kHz																							
	$30 \text{ MHz} \leq f < f_c - m$	100 kHz																							
	$f_c - m \leq f < f_c - n$	10 kHz																							
	$f_c - n \leq f < f_c - p$	1 kHz																							
	$f_c + p < f \leq f_c + n$	1 kHz																							
	$f_c + n < f \leq f_c + m$	10 kHz																							
	$f_c + m < f \leq 1 \text{ GHz}$	100 kHz																							
	$1 \text{ GHz} < f \leq 6 \text{ GHz}$	1 MHz																							
Test Frequency range:	25MHz to 6GHz																								
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>Other frequencies below 1000 MHz</td> <td>2nW(-57dBm)</td> </tr> <tr> <td>Above 1000 MHz</td> <td>20nW(-47dBm)</td> </tr> </tbody> </table>	Frequency	Limit	Other frequencies below 1000 MHz	2nW(-57dBm)	Above 1000 MHz	20nW(-47dBm)																		
Frequency	Limit																								
Other frequencies below 1000 MHz	2nW(-57dBm)																								
Above 1000 MHz	20nW(-47dBm)																								
Test setup:	<p><b>Below 1GHz</b></p>  <p><b>Above 1GHz</b></p> 																								
Test procedure:	Substitution method was performed to determine the actual ERP emission																								

	<p>levels of the EUT. The following test procedure as below:</p> <p><b>Below 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. On the test site as test setup graph above, the EUT shall be placed at the 1.5m support on the turntable and in the position closest to normal use as declared by the provider.</li> <li>2. The test antenna shall be oriented initially for vertical polarization and shall be chosen to correspond to the frequency of the transmitter. The output of the test antenna shall be connected to the measuring receiver.</li> <li>3. The transmitter shall be switched on, if possible, without modulation and the measuring receiver shall be tuned to the frequency of the transmitter under test.</li> <li>4. The test antenna shall be raised and lowered from 1m to 4m until a maximum signal level is detected by the measuring receiver. Then the turntable should be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.</li> <li>5. Repeat step 4 for test frequency with the test antenna polarized horizontally.</li> <li>6. Remove the transmitter and replace it with a substitution antenna (the antenna should be half-wavelength for each frequency involved). The center of the substitution antenna should be approximately at the same location as the center of the transmitter. At the lower frequencies, where the substitution antenna is very long, this will be impossible to achieve when the antenna is polarized vertically. In such case the lower end of the antenna should be 0.3 m above the ground.</li> <li>7. Feed the substitution antenna at the transmitter end with a signal generator connected to the antenna by means of a nonradiating cable. With the antennas at both ends vertically polarized, and with the signal generator tuned to a particular test frequency, raise and lower the test antenna to obtain a maximum reading at the spectrum analyzer. Adjust the level of the signal generator output until the previously recorded maximum reading for this set of conditions is obtained. This should be done carefully repeating the adjustment of the test antenna and generator output.</li> <li>8. Repeat step 7 with both antennas horizontally polarized for each test frequency.</li> <li>9. Calculate power in dBm into a reference ideal half-wave dipole antenna by reducing the readings obtained in steps 7 and 8 by the power loss in the cable between the generator and the antenna, and further corrected for the gain of the substitution antenna used relative to an ideal half-wave dipole antenna by the following formula:  <math display="block">\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dB)}</math>                     where:                      Pg is the generator output power into the substitution antenna.</li> </ol> <p><b>Above 1GHz:</b></p> <p>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber, and the test antenna do not need to raise from 1 to 4m, just test in 1.5m height.</p>
Measurement Record:	Uncertainty: 4.64dB

Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Measurement Data

Lowest channel

Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
119.90	Vertical	-81.74	2nW/ -57dBm below 1GHz,  20nW/ -47dBm above 1GHz.	Pass
594.44	V	-73.47		
1445.00	V	-62.84		
2960.00	V	-65.27		
4950.00	V	-62.73		
5665.00	V	-60.28		
61.04	Horizontal	-88.75		
869.20	H	-70.72		
2020.00	H	-64.65		
3125.00	H	-63.99		
3895.00	H	-65.76		
5220.00	H	-62.83		

Middle channel

Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
103.47	Vertical	-80.85	2nW/ -57dBm below 1GHz,  20nW/ -47dBm above 1GHz.	Pass
428.55	V	-70.58		
1941.00	V	-61.86		
2860.00	V	-62.88		
4830.00	V	-63.79		
5962.00	V	-62.75		
32.04	Horizontal	-83.44		
899.80	H	-71.72		
2020.00	H	-68.99		
3125.00	H	-64.83		
3895.00	H	-65.66		
5220.00	H	-64.83		

Highest channel

Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
119.90	Vertical	-82.59	2nW/ -57dBm below 1GHz,  20nW/ -47dBm above 1GHz.	Pass
594.44	V	-74.88		
1445.00	V	-63.89		
2960.00	V	-65.08		
4950.00	V	-63.89		
5665.00	V	-65.77		
49.04	Horizontal	-81.86		
709.20	H	-72.75		
2520.00	H	-63.47		
3027.00	H	-62.88		
3955.00	H	-65.76		
5960.00	H	-61.75		

## **8 Test Setup Photo**

Reference to the **appendix I** for details.

## **9 EUT Constructional Details**

Reference to the **appendix II** for details.

-----End-----