

## EMC REPORT

**Applicant:** Dragino Technology Co., Limited.

**Address of Applicant:** Room 7009, Zi'An Commercial Building, Qian Jin 1 Road, Xin'An 6th District, Baoan, Shenzhen, China

**Equipment Under Test (EUT)**

**Product Name:** Wireless Sensor Node / ATA

**Model No.:** DT01, MP2.0 Phone, MP2.0 Basic, MS14-P, MS14-S, MS14-HEV

**Applicable standards:** ETSI EN 301 489-1 V1.9.2 (2011-09)  
ETSI EN 301 489-17 V2.2.1 (2012-09)

**Date of sample receipt:** December 01, 2015

**Date of Test:** December 02-14, 2015

**Date of report issue:** December 15, 2015

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 1999/5/EC are considered.



**Robinson Lo**

**Laboratory Manager**

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

Version No.	Date	Description
00	December 15, 2015	Original

Prepared By:

*Edward Pan*

Date:

December 15, 2015

Project Engineer

Check By:

*Hank Yan*

Date:

December 15, 2015

Reviewer

## 3 Contents

	Page
1 COVER PAGE .....	1
2 VERSION .....	2
3 CONTENTS .....	3
4 TEST SUMMARY .....	4
5 GENERAL INFORMATION .....	5
5.1 CLIENT INFORMATION .....	5
5.2 GENERAL DESCRIPTION OF EUT .....	5
5.3 OPERATING MODES .....	6
5.4 DESCRIPTION OF SUPPORT UNITS .....	6
5.5 TEST FACILITY .....	6
5.6 TEST LOCATION .....	6
5.7 DEVIATION FROM STANDARDS .....	6
5.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	6
5.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
6 EQUIPMENT USED DURING TEST .....	7
7 EMC REQUIREMENTS SPECIFICATION IN ETSI EN 301 489-3/17 .....	10
7.1 EMI (EMISSION) .....	10
7.1.1 Radiated Emission .....	10
7.1.2 Conducted Emissions .....	13
7.1.3 Harmonics Test Results.....	16
7.1.4 Flicker Test Results .....	16
7.2 IMMUNITY .....	17
7.2.1 Electrostatic Discharge .....	18
7.2.2 Radiated Immunity .....	20
7.2.3 Radio frequency common mode.....	22
7.2.4 Electrical Fast Transients.....	24
7.2.5 Surge.....	26
7.2.6 Voltage Dip and Voltage Interruptions .....	28
8 TEST SETUP PHOTO .....	30
9 EUT CONSTRUCTIONAL DETAILS .....	34

## 4 Test Summary

<b>EMI Test</b>				
Test Item	Test Requirement	Test Method	Application	Result
Radiated Emission	ETSI EN 301 489-17	ETSI EN301 489-1	Enclosure	Pass
Conducted Emission	ETSI EN 301 489-17	ETSI EN301 489-1	AC port	Pass
Harmonic Current Emissions	ETSI EN 301 489-17	ETSI EN301 489-1	AC port	N/A
Voltage Fluctuations and Flicker	ETSI EN 301 489-17	ETSI EN301 489-1	AC port	Pass
<b>EMS Test</b>				
ESD (Electrostatic Discharge)	ETSI EN 301 489-17	EN 61000-4-2	Enclosure	Pass
Radiated Immunity, 80MHz to 2.7 GHz	ETSI EN 301 489-17	EN 61000-4-3	Enclosure	Pass
EFT (Electrical Fast Transients)	ETSI EN 301 489-17	EN 61000-4-4	AC port	Pass
Surge Immunity	ETSI EN 301 489-17	EN 61000-4-5	AC port	Pass
Injected Currents 150kHz to 80MHz	ETSI EN 301 489-17	EN 61000-4-6	AC port	Pass
Voltage Dips and Interruptions	ETSI EN 301 489-17	EN 61000-4-11	AC port	Pass

*Remark:*

*Pass: The EUT complies with the essential requirements in the standard.*

*N/A: not applicable.*

## 5 General Information

### 5.1 Client Information

Applicant:	Dragino Technology Co., Limited.
Address of Applicant:	Room 7009, Zi'An Commercial Building, Qian Jin 1 Road, Xin'An 6thDistrict, Baoan, Shenzhen, China
Manufacturer/ Factory:	Dragino Technology Co., Limited.
Address of Manufacturer/ Factory:	Room 7009, Zi'An Commercial Building, Qian Jin 1 Road, Xin'An 6thDistrict, Baoan, Shenzhen, China

### 5.2 General Description of EUT

Product Name:	Wireless Sensor Node / ATA
Model No.:	DT01, MP2.0 Phone, MP2.0 Basic, MS14-P, MS14-S, MS14-HEV
Operation Frequency:	2412MHz~2472MHz(802.11b/802.11g/802.11n(H20)) 2422MHz~2462MHz (802.11n(H40))
Channel Numbers:	13 for 802.11b/802.11g/802.11n(HT20) 9 for 802.11n(HT40)
Channel Separation:	5MHz
Modulation Technology: (IEEE 802.11b)	Direct Sequence Spread Spectrum(DSSS)
Modulation Technology: (IEEE 802.11g/802.11n)	Orthogonal Frequency Division Multiplexing(OFDM)
Antenna Type:	External antenna
Antenna Gain:	2.0dBi (declare by Applicant)
Power Supply:	Adapter: Model:F05W-120050SPAV Input:AC100-240V~50/60Hz, 190mA Output:DC 12V 0.5A

### 5.3 Operating Modes

Operating mode	Detail description
WiFi mode	Keep the EUT in charging and play internet information by wifi network.

### 5.4 Description of Support Units

None.
-------

### 5.5 Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> <li>● <b>FCC —Registration No.: 600491</b> Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.</li> <li>● <b>Industry Canada (IC) —Registration No.: 9079A-2</b> The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. Has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.</li> </ul>
---

### 5.6 Test Location

RI test was performed at:
SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab, No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.
All other tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China Tel: 0755-27798480 Fax: 0755-27798960

### 5.7 Deviation from Standards

None.
-------

### 5.8 Abnormalities from Standard Conditions

None.
-------

### 5.9 Other Information Requested by the Customer

None.
-------

## 6 Equipment Used during Test

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 28 2015	Mar. 27 2016
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 30 2015	June 29 2016
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Feb. 22 2015	Feb. 21 2016
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 26 2015	June 25 2016
6	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 27 2015	Mar. 26 2016
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
8	Coaxial Cable	GTS	N/A	GTS213	Mar. 28 2015	Mar. 27 2016
9	Coaxial Cable	GTS	N/A	GTS211	Mar. 28 2015	Mar. 27 2016
10	Coaxial cable	GTS	N/A	GTS210	Mar. 28 2015	Mar. 27 2016
11	Coaxial Cable	GTS	N/A	GTS212	Mar. 28 2015	Mar. 27 2016
12	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 30 2015	June 29 2016
13	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 30 2015	June 29 2016
14	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 26 2015	June 25 2016
15	Band filter	Amindeon	82346	GTS219	Mar. 28 2015	Mar. 27 2016
16	Constant temperature and humidity box	Oregon Scientific	BA-888	GTS248	May 09 2015	May 08 2016
17	D.C. Power Supply	Instek	PS-3030	GTS232	May 09 2015	May 08 2016
18	Universal radio communication tester	Rohde & Schwarz	CMU200	GTS235	May 09 2015	May 08 2016
19	Splitter	Agilent	11636B	GTS237	May 09 2015	May 08 2016

<b>Conducted Emission:</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	Sep. 06 2015	Sep. 05 2016
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	June 30 2015	June 29 2016
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	June 30 2015	June 29 2016
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 30 2015	June 29 2016
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	June 30 2015	June 29 2016
6	Coaxial Cable	GTS	N/A	GTS227	June 30 2015	June 29 2016
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

<b>ESD:</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	ESD Simulator	EMPEK	ESD-2030A	GTS242	June 30 2015	June 29 2016

<b>Conducted Immunity:</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	RF-Generator	SCHAFFNER	NSG 2070	SEL0039	Oct. 18 2015	Oct. 17 2016
2	Coupling/Decoupling Network	SCHAFFNER	CDN M016	SEL0040	Oct. 18 2015	Oct. 17 2016
3	EM CLAMP	SCHAFFNER	KEMZ 801	SEL0041	Oct. 18 2015	Oct. 17 2016

<b>Harmonic/ Flicker:</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Power Analyzer	EMTEST	DPA500	GTS235	June 30 2015	June 29 2016
2	AC Power Source	EMTEST	ACS500	GTS236	June 30 2015	June 29 2016
3	Test software	EMTEST	ACS	N/A	N/A	N/A

<b>EFT, Surge, Voltage dips and Interruption:</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	EMTEST system	EMTEST	UCS500N	GTS239	June 30 2015	June 29 2016
2	Capacitive Clamp	Thermo ELECTRON	N/A	GTS241	N/A	N/A





<b>Radiated Immunity:</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	June 12 2015	June 11 2016
2	Signal Generator	Rohde & Schwarz	SML03	SEL0068	June 19 2015	June 18 2016
3	RF Amplifier 30M-1GHz	Amplifier Research	250W1000A	SEL0066	Nov. 01 2015	Oct. 30 2016
4	RF Amplifier 0.8-3.0GHz	Amplifier Research	60S1G3	SEL0065	Nov. 01 2015	Oct. 30 2016
5	Power Meter	Rohde & Schwarz	NRVD	SEL0069	June 19 2015	June 18 2016
6	Power Sensor	Rohde & Schwarz	URV5-Z2	SEL0071	June 19 2015	June 18 2016
7	Power Sensor	Rohde & Schwarz	URV5-Z2	SEL0072	June 19 2015	June 18 2016
8	Software EMC32	Rohde & Schwarz	EMC32-S	SEL0082	N/A	N/A
9	Log-periodic Antenna	Amplifier Research	AT1080	SEL0073	N/A	N/A
10	Antenna Tripod	Amplifier Research	TP1000A	SEL0074	N/A	N/A
11	High Gain Horn Antenna (0.8-5GHz)	Amplifier Research	AT4002A	SEL0075	N/A	N/A
12	Audio Analyzer	Rohde & Schwarz	UPL 16	SEL0076	June 19 2015	June 18 2016
13	Nexus conditioning amplifier	B&K	2690	SEL0078	June 19 2015	June 18 2016
14	Mouth simulator	B&K	4227	SEL0079	June 19 2015	June 18 2016
15	Sound level calibrator	B&K	4231	SEL0080	June 19 2015	June 18 2016
16	Universal radio communication tester	Rohde & Schwarz	CMU200	SEL0081	June 19 2015	June 18 2016

<b>General used equipment:</b>						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Humidity/ Temperature Indicator	Shanghai	ZJ1-2B	GTS243	July 02 2015	July 01 2016
2	Barometer	ChangChun	DYM3	GTS255	July 07 2015	July 06 2016

## 7 EMC Requirements Specification in ETSI EN 301 489-3/17

### 7.1 EMI (Emission)

#### 7.1.1 Radiated Emission

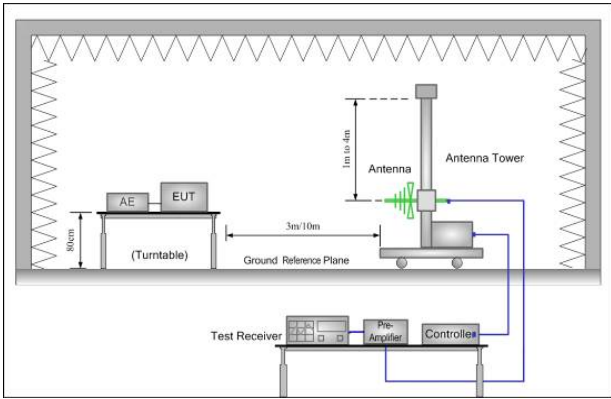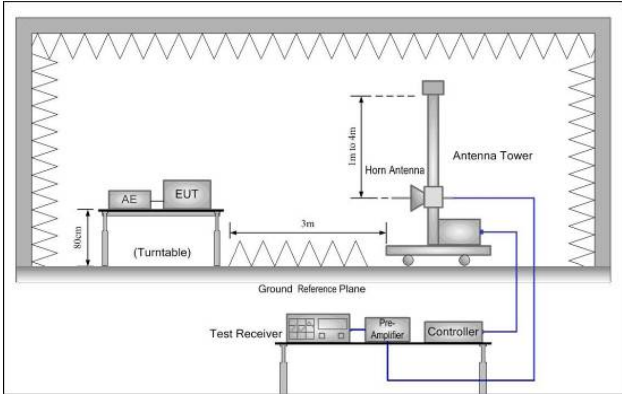Test Requirement:	ETSI EN 301 489-17				
Test Method:	ETSI EN 301 489-1 and EN55016-2-3				
Test Frequency Range:	30MHz to 6GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
AV		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)		Remark	
	30MHz-230MHz	40.00		Quasi-peak Value	
	230MHz-1GHz	47.00		Quasi-peak Value	
	1GHz-3GHz	50.00		Average Value	
		70.00		Peak Value	
	3GHz-6GHz	54.00		Average Value	
74.00		Peak Value			
Test setup:	Below 1GHz				
					
Test setup:	Above 1GHz				
					

<p>Test Procedure:</p>	<p>■ <b>From 30MHz to 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. The radiated emissions test was conducted in a semi-anechoic chamber.</li> <li>2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.</li> <li>3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emissions spectrum plots of the EUT.</li> <li>4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.</li> </ol> <p>■ <b>Above 1GHz:</b></p> <ol style="list-style-type: none"> <li>1. The radiated emissions test was conducted in a fully-anechoic chamber.</li> <li>2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.</li> <li>3. Before final measurements of radiated emissions, a pre-scan was performed in the spectrum mode with the peak detector to find out the maximum emission spectrum plots of the EUT.</li> <li>4. The frequencies of maximum emission were determined in the final radiated emissions measurement. At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the maximum disturbance. Measurements were performed for both horizontal and vertical antenna polarization.</li> </ol>
<p>Test environment:</p>	<p>Temp.: 25 °C Humid.: 50% Press.: 1 010mbar</p>
<p>Measurement Record:</p>	<p>Uncertainty: ± 4.5dB</p>
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Pass</p>

**Remark:**

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

## Measurement Data

### Below 1GHz

WiFi Mode

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
37.55	49.35	14.96	0.64	30.06	34.89	40.00	-5.11	Vertical
46.02	48.11	15.49	0.73	30.02	34.31	40.00	-5.69	Vertical
64.66	50.34	12.84	0.90	29.89	34.19	40.00	-5.81	Vertical
110.96	46.63	14.04	1.29	29.63	32.33	40.00	-7.67	Vertical
214.51	46.62	13.03	1.93	29.35	32.23	40.00	-7.77	Vertical
299.32	50.11	15.03	2.35	30.00	37.49	47.00	-9.51	Vertical
64.66	45.20	12.84	0.90	29.89	29.05	40.00	-10.95	Horizontal
94.43	45.11	14.75	1.15	29.72	31.29	40.00	-8.71	Horizontal
108.65	43.48	14.39	1.27	29.64	29.50	40.00	-10.50	Horizontal
206.40	47.11	12.77	1.88	29.27	32.49	40.00	-7.51	Horizontal
299.32	55.32	15.03	2.35	30.00	42.70	47.00	-4.30	Horizontal
750.11	38.44	21.43	4.28	29.20	34.95	47.00	-12.05	Horizontal

### Above 1GHz

WiFi Mode

Peak measurement

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarity
1075.00	37.72	24.69	4.36	32.87	33.90	70.00	-36.10	Vertical
2075.00	35.78	26.71	5.05	34.38	33.16	70.00	-36.84	Vertical
2985.00	35.12	28.46	5.91	33.33	36.16	70.00	-33.84	Vertical
3790.00	32.37	29.36	7.50	32.42	36.81	74.00	-37.19	Vertical
4870.00	32.15	31.85	8.66	32.12	40.54	74.00	-33.46	Vertical
5605.00	30.10	32.27	9.65	32.37	39.65	74.00	-34.35	Vertical
1400.00	36.36	25.58	4.61	33.45	33.10	70.00	-36.90	Horizontal
2810.00	35.93	28.41	5.76	33.55	36.55	70.00	-33.45	Horizontal
3550.00	33.09	29.08	7.05	32.69	36.53	74.00	-37.47	Horizontal
4380.00	32.54	31.01	8.23	31.88	39.90	74.00	-34.10	Horizontal
5085.00	29.56	32.02	8.90	32.22	38.26	74.00	-35.74	Horizontal
5720.00	27.46	32.53	9.81	32.29	37.51	74.00	-36.49	Horizontal

#### Remark:

1. The EUT was test at 3m in field chamber.
2. If the average limit is met when using a Peak detector, the EUT shall be deemed to meet both peak and average limits. And measurement with the average detector is unnecessary.


## 7.1.2 Conducted Emissions

Test Requirement:	ETSI EN 301 489-17					
Test Method:	ETSI EN 301 489-1					
Test Frequency Range:	150kHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9kHz, VBW=30kHz					
Limit:	Frequency range (MHz)	Limit (dBuV)				
		Quasi-peak	Average			
	0.15-0.5	66 to 56*	56 to 46*			
	0.5-5	56	46			
	5-30	60	50			
* Decreases with the logarithm of the frequency.						
Test setup:						
	<p><i>Remark:</i>                      E.U.T: Equipment Under Test                      LISN: Line Impedance Stabilization Network                      Test table height=0.8m</p>					
Test procedure	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to EN55022 Class B on conducted measurement.</li> </ol>					
Test Instruments:	Temp.:	24 °C	Humid.:	51%	Press.:	1 010mbar
Measurement Record:	Uncertainty: ± 3.45dB					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.3 for details					
Test results:	Pass					

## Measurement Data

WIFI Mode


Line:

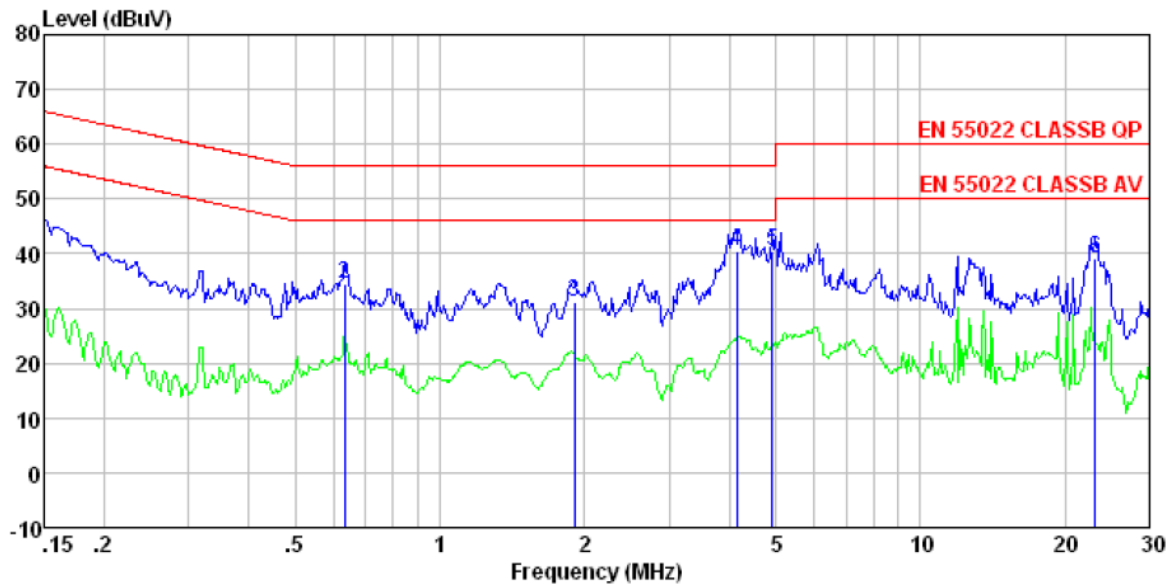

Condition : EN 55022 CLASSB QP LISN-2013 LINE  
 Job No. : 2067RF  
 Test mode : Wifi mode  
 Test Engineer: Rong

	Read Freq	LISN Level	Cable Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.150	41.92	0.15	0.12	42.19	66.00	-23.81	QP
2	0.634	34.21	0.13	0.13	34.47	56.00	-21.53	QP
3	1.908	31.02	0.12	0.14	31.28	56.00	-24.72	QP
4	4.158	40.26	0.20	0.15	40.61	56.00	-15.39	QP
5	4.926	40.09	0.21	0.15	40.45	56.00	-15.55	QP
6	23.140	37.85	0.98	0.23	39.06	60.00	-20.94	QP

Neutral:

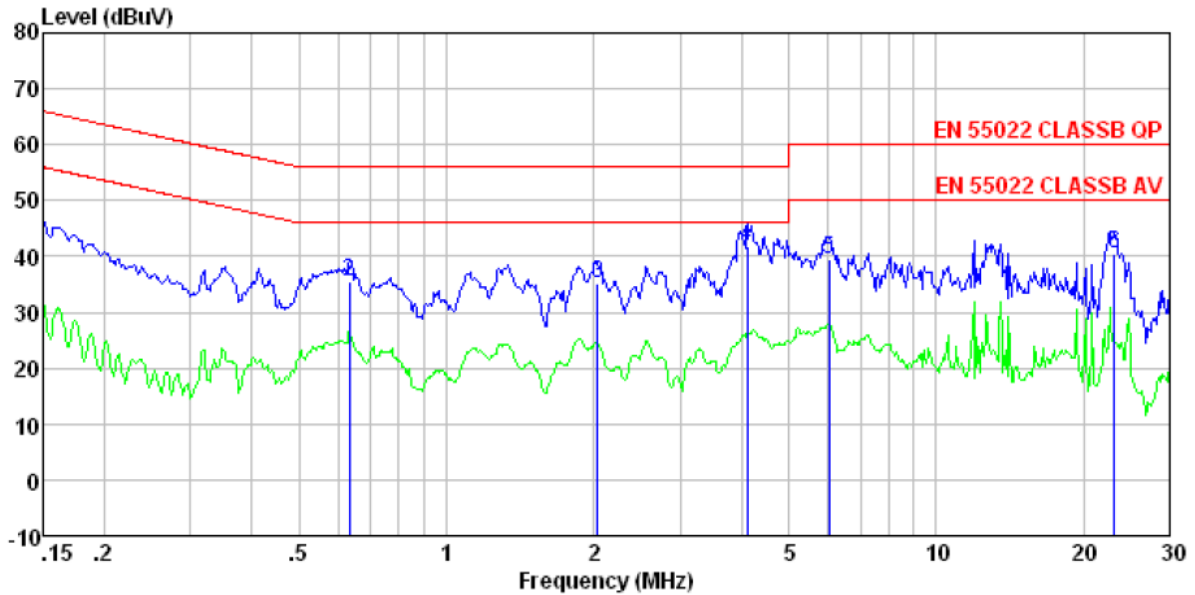

Condition : EN 55022 CLASSB QP LISN-2013 NEUTRAL  
 Job No. : 2067RF  
 Test mode : Wifi mode  
 Test Engineer: Rong

	Read Level	LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
Freq	Level					
MHz	dBuV	dB	dB	dBuV	dB	
1	0.150	42.14	0.07	0.12	42.33	66.00 -23.67 QP
2	0.634	35.26	0.07	0.13	35.46	56.00 -20.54 QP
3	2.033	34.87	0.09	0.15	35.11	56.00 -20.89 QP
4	4.114	41.46	0.14	0.15	41.75	56.00 -14.25 QP
5	6.056	39.17	0.16	0.16	39.49	60.00 -20.51 QP
6	23.140	39.25	0.89	0.23	40.37	60.00 -19.63 QP

Notes:

1. An initial pre-scan was performed on the live and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

### 7.1.3 Harmonics Test Results

Test Requirement:	ETSI EN 301 489-17: EN 61000-3-2
Test Method:	N/A: See Remark Below
Remark:	<p>There is no need for Harmonics test to be performed on this product (rated power is less than 75W) in accordance with EN 61000-3-2. For further details, please refer to Clause 7, Note 1 of EN 61000-3-2</p> <p>Which states:          "For the following categories of equipment limits are not specified in this edition of the standard.          Note 1: Equipment with a rated power of 75W or less, other than lighting equipment."</p>

### 7.1.4 Flicker Test Results

Test Requirement:	ETSI EN 301 489-17: EN 61000-3-3
Test Method:	EN 61000-3-3
Class/Severity:	Clause 5 of EN 61000-3-3
Measurement Time:	10 min
Detector:	As per EN 61000-3-3
Test Instruments:	Temp.: 24 °C    Humid.: 51%    Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details, Only show test data of the worse mode on the test report.
Test results:	Pass

### Measurement Data

#### Test Data of Voltage Fluctuation and Flicker

Final Test Result	<b>Pass</b>
Nominal Voltage	230 V
Nominal Frequency	50 Hz
Plt Test Duration	600 s
Flicker Margin	10 %
d Measurement Margin	10 %

Segment	Pst	dmax(%)	dc(%)	d(t)>3.3%(ms)	Judge
Limit	1.000	4.000	3.300	500	
Seg. 1	0.006	0.039	0.000	0	<b>Pass</b>

Plt	Value	Judge
Limit	0.650	
Measurement	0.003	<b>Pass</b>



## 7.2 Immunity

Performance Criteria of ETSI EN 301 489-17, clause 6	
Continuous phenomena applied to transmitters (CT)	<ol style="list-style-type: none"> <li>1. During the test, the uplink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check).</li> <li>2. At the conclusion of the test, the EUT shall operate as intended with no loss of user control functions or stored data, and the communication link shall have been maintained.</li> <li>3. In addition to confirming the above performance during a call, the test shall also be performed in idle mode, and the transmitter shall not unintentionally operate.</li> </ol>
Transient phenomena applied to Transmitters (TT)	<ol style="list-style-type: none"> <li>1. At the conclusion of each exposure the EUT shall operate with no user noticeable loss of the communication link.</li> <li>2. At the conclusion of the total test comprising the series of individual exposures, the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communication link shall have been maintained.</li> <li>3. In addition to confirming the above performance during a call, the test shall also be performed in idle mode, and the transmitter shall not unintentionally operate.</li> </ol>
Continuous phenomena applied to Receivers (CR)	<ol style="list-style-type: none"> <li>1. During the test, the RXQUAL of the downlink shall not exceed the value of three, measured during each individual exposure in the test sequence.</li> <li>2. During the test, the downlink speech output level shall be at least 35 dB less than the previously recorded reference levels, when measured through an audio band pass filter of width 200 Hz, centred on 1 kHz (audio breakthrough check).</li> <li>3. At the conclusion of the test, the EUT shall operate as intended with no loss of user control the The communication link shall have been maintained.</li> </ol>
Transient phenomena applied to Receivers (TR)	<ol style="list-style-type: none"> <li>1. At the conclusion of each exposure the EUT shall operate with no user noticeable loss of the communication link.</li> <li>2. At the conclusion of the total test comprising the series of individual exposures, the EUT shall operate as intended with no loss of user control functions or stored data, as declared by the manufacturer, and the communication link shall have been maintained</li> </ol>
Ancillary equipment tested on a stand alone basis	<p>If ancillary equipment is intended to be tested on a stand alone basis, the performance criteria described in the clauses above are not appropriate, then the manufacturer shall declare, for inclusion in the test report, his own specification for an acceptable level of performance or degradation of performance during and/or after the immunity tests. The performance specification shall be included in the product description and documentation.</p>

## 7.2.1 Electrostatic Discharge

Test Requirement:	ETSI EN 301 489-17
Test Method:	EN 61000-4-2
Discharge Voltage:	Contact Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$ Air Discharge: $\pm 2\text{kV}$ , $\pm 4\text{kV}$ , $\pm 8\text{kV}$ HCP/VCP: $\pm 2\text{kV}$ , $\pm 4\text{kV}$
Polarity:	Positive & Negative
Number of Discharge:	Contact Discharge: Minimum 25 times at each test point, Air Discharge: Minimum 10 times at each test point.
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum
Limit:	Criteria B
Test setup:	
Test Procedure:	<p><b>Air discharge:</b></p> <ol style="list-style-type: none"> <li>1. The test was applied on non-conductive surfaces of EUT.</li> <li>2. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT.</li> <li>3. After each discharge, the discharge electrode was removed from the EUT.</li> <li>4. The generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point.</li> <li>5. This procedure was repeated until all the air discharge completed</li> </ol> <p><b>Contact Discharge:</b></p> <ol style="list-style-type: none"> <li>1. The test was applied on conductive surfaces of EUT.</li> <li>2. the generator was re-triggered for a new single discharge and repeated 10 times for each pre-selected test point.</li> <li>3. the tip of the discharge electrode was touch the EUT before the discharge switch was operated.</li> </ol> <p><b>Indirect discharge for horizontal coupling plane</b></p> <ol style="list-style-type: none"> <li>1. At least 10 single discharges shall be applied at the front edge of each HCP opposite the centre point of each unit of the EUT and 0.1m from the front of the EUT.</li> <li>2. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.</li> <li>3. Consideration should be given to exposing all sides of the EUT.</li> </ol>

	<b>Indirect discharge for vertical coupling plane</b> 1. At least 10 single discharges were applied to the center of one vertical edge of the coupling plane. 2. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. 3. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

**Measurement Record:**

Test points:	I: LAN port, Screws			
	II: Cover seams, Holes, USB port, DC port. Phone port			
<b>Direct discharge</b>				
Discharge Voltage (KV)	Type of discharge	Test points	Observations Performance	Result
± 2, ± 4	Contact	I	A	Pass
± 2, ± 4, ± 8	Air	II	A	Pass
<b>Indirect discharge</b>				
Discharge Voltage (KV)	Type of discharge	Test points	Observation Performance	Result
± 2, ± 4	HCP-Bottom/Top/ Front/Back/Left/Right	Edge of the HCP	A	Pass
± 2, ± 4	VCP-Front/Back /Left/Right	Center of the VCP	A	Pass

Remark:

A: Normal performance within the specification limits.

## 7.2.2 Radiated Immunity

Test Requirement:	ETSI EN 301 489-17
Test Method:	EN 61000-4-3
Frequency range:	80MHz to 1GHz, 1.4GHz to 2.7GHz
Test Level:	3V/m
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	Criteria A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> <li>1. For table-top equipment, the EUT was placed in the chamber on a non-conductive table 0.8m high. For arrangement of floor-standing equipment, the EUT was mounted on a non-conductive support 0.1m above the supporting plane. For human body-mounted equipment, the EUT may be tested in the same manner as table top items.</li> <li>2. If possible, a minimum of 1 m of cable is exposed to the electromagnetic field. Excess length of cables interconnecting units of the EUT shall be bundled low-inductively in the approximate center of the cable to form a bundle 30 cm to 40 cm in length.</li> <li>3. The EUT was initially placed with one face coincident with the calibration plane. The EUT face being illuminated was contained within the UFA (Uniform Field Area).</li> <li>4. The frequency ranges to be considered were swept with the signal modulated and pausing to adjust the RF signal level or to switch oscillators and antennas as necessary. Where the frequency range was swept incrementally, the step size was not exceed 1 % of the preceding frequency value.</li> <li>5. The dwell time of the amplitude modulated carrier at each frequency was not be less than the time necessary for the EUT to be exercised and to respond, and was not less than 0,5 s.</li> <li>6. The test normally was performed with the generating antenna facing each side of the EUT.</li> <li>7. The polarization of the field generated by each antenna necessitates testing each selected side twice, once with the antenna positioned vertically and again with the antenna positioned horizontally.</li> <li>8. The EUT was performed in a configuration to actual installation conditions, a video camera and/or a audio monitor were used to monitor the performance of the EUT.</li> </ol>

Test monitor:	<b>Traffic mode:</b> Uplink level, downlink level, RX quality
	<b>Idle mode:</b> 1. The test system shall simulate a Base Station (BS) with Broadcast Control Channel/Common Control Channel (BCCH/CCCH) on one carrier. 2. The EUT shall be synchronized to the BCCH, listening to the CCCH and able to respond to paging messages.
Test environment:	Temp.: 25 °C Humid.: 52% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test results:	Pass


**Measurement Record:**

Frequency	Level	Modulation	Antenna Polarization	EUT Face	Observations (Performance Criterion)
80 MHz-1 GHz 1.4GHz-2.7GHz	3 V/m	1 kHz, 80 % Amp. Mod, 10 % increment, dwell time=3seconds	V	Front	A
			H		A
			V	Rear	A
			H		A
			V	Left	A
			H		A
			V	Right	A
			H		A
			V	Top	A
			H		A
			V	Bottom	A
			H		A

Remarks:

A: Normal performance within the specification limits.

### 7.2.3 Radio frequency common mode

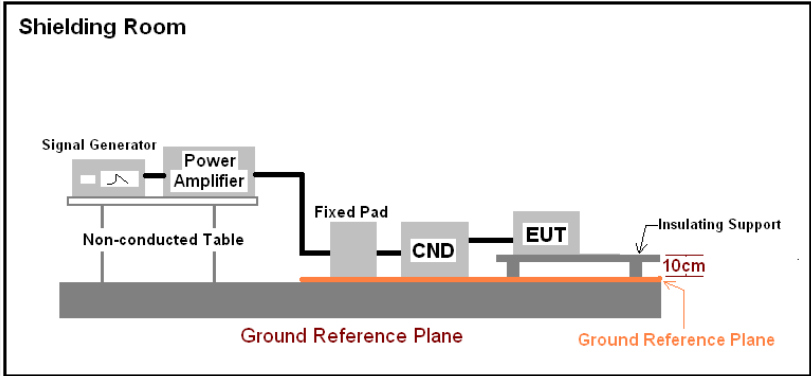Test Requirement:	ETSI EN 301 489-17
Test Method:	EN 61000-4-6
Frequency range:	0.15MHz to 80MHz
Test Level:	3V rms on AC Ports (unmodulated emf into 150 Ω)
Modulation:	80%, 1kHz Amplitude Modulation
Performance Criterion:	Criteria A
Test setup:	
Test Procedure:	<ol style="list-style-type: none"> <li>1. Let the EUT work in test mode and test it.</li> <li>2. The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).</li> <li>3. The disturbance signal described below is injected to EUT through CDN.</li> <li>4. The EUT operates within its operational mode(s) under intended climatic conditions after power on.</li> <li>5. The frequency range is swept from 0.150MHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave. The rate of sweep shall not exceed <math>1.5 \cdot 10^{-3}</math> decades/s. Where the frequency is swept incrementally; the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.</li> <li>6. Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.</li> </ol>
Test environment:	Temp.: 24 °C Humid.: 51% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test results:	Pass


### Measurement Record:

Frequency	Injected Position	Test Level	Modulation	Step Size	Dwell Time	Observations (Performance Criterion)
150kHz to 80MHz	AC Main	3Vrms	80%, 1kHz Amp. Mod.	1%	2s	A

Remark:

A: Normal performance within the specification limits.

## 7.2.4 Electrical Fast Transients

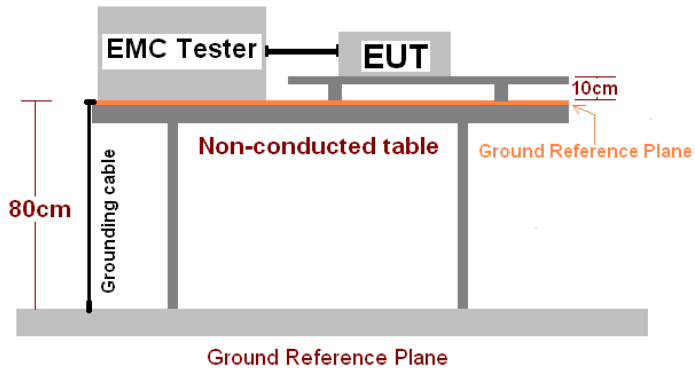Test Requirement:	ETSI EN 301 489-17
Test Method:	EN 61000-4-4
Test Level:	1.0kV on AC port
Polarity:	Positive & Negative
Repetition Frequency:	5kHz
Burst Duration:	15ms
Burst Period:	300ms
Test Duration:	2 minute per level & polarity
Performance Criterion:	B
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester is connected to an EUT (Equipment Under Test). Both are placed on a non-conducted table that is 80cm high. A grounding cable is connected to the table. The EUT is positioned 10cm above the ground reference plane. The ground reference plane is a metallic sheet that extends beyond the EUT on all sides.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support 0.1m + 0.01m thick. The ground reference plane was 1m*1m metallic sheet with 0.65mm minimum thickness.</li> <li>2. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m.</li> <li>3. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.</li> <li>4. The length of the signal and power lines between the coupling device and the EUT is 0.5m</li> </ol> <p><b>Test on Signal Ports, Telecommunication Ports and Control Ports:</b> The EFT interference signal is through a coupling clamp device couples to the signal and control lines of the EUT with burst noise for 2 minutes.</p> <p><b>Test on power supply ports:</b></p> <ol style="list-style-type: none"> <li>1. The EUT is connected to the power mains through a coupling device that directly couples the EFT/B interference signal.</li> <li>2. Each of the Line and Neutral conductors is impressed with burst noise for 2 minutes.</li> </ol>
Test environment:	Temp.: 26 °C ; Humid.: 54% ; Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details



Test mode:	Refer to section 5.3 for details
Test results:	Pass


**Measurement Record:**

Lead under Test	Level ( $\pm$ kV)	Coupling Direct/Clamp	Observations (Performance Criterion)	Result
L	$\pm 1.0$	Direct	A	Pass
N	$\pm 1.0$	Direct	A	Pass
L-N	$\pm 1.0$	Direct	A	Pass

Remark:

A: Normal performance within the specification limits

## 7.2.5 Surge

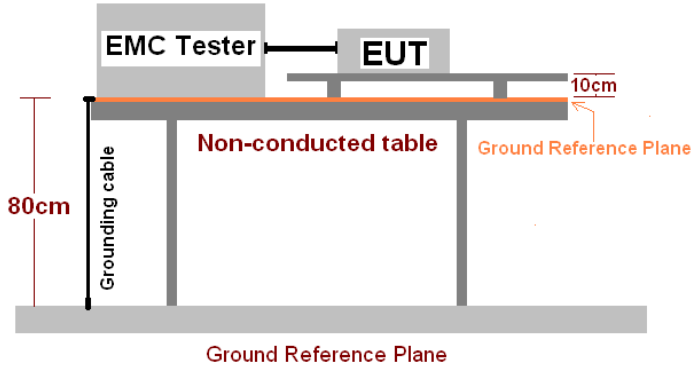Test Requirement:	ETSI EN 301 489-17
Test Method:	ETSI EN 61000-4-5
Test Level:	±1kV Live to Neutral: Differential mode
Polarity:	Positive & Negative
Test Interval:	60s between each surge
No. of surges:	5 positive, 5 negative at 0°, 90°, 180°, 270°.
Performance Criterion:	B
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester and an EUT (Equipment Under Test) are positioned on a non-conducted table. The table is 80cm high and has a grounding cable. A ground reference plane is located 10cm below the table surface.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1. For line-to-line coupling mode, provide a 1kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2kV.</li> <li>2. At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.</li> <li>3. Different phase angles are done individually.</li> <li>4. Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.</li> </ol>
Test environment:	Temp.: 26 °C   Humid.: 53%   Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


**Measurement Record:**

Location	Level(kV)	Pulse No	Surge Interval	Phase(deg)	Observations (Performance Criterion)
L-N	± 1	5	60s	0°	A
				90°	A
				180°	A
				270°	A

Remark:

A. Normal performance within the specification limits

## 7.2.6 Voltage Dip and Voltage Interruptions

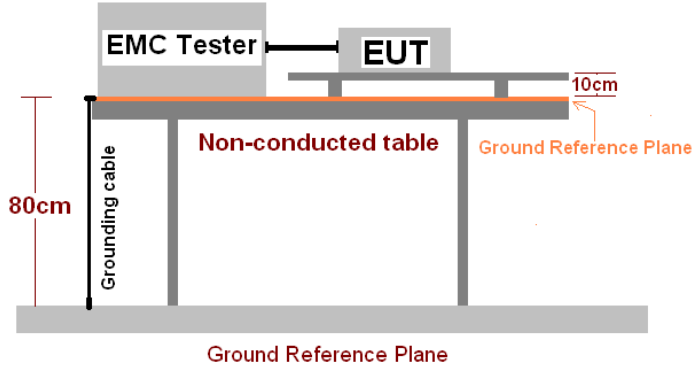Test Requirement:	ETSI EN 301 489-17
Test Method:	EN 61000-4-11
Test Level:	0% of VT(Supply Voltage) for 0.5 period 0% of VT(Supply Voltage) for 1.0 period 70% of VT(Supply Voltage) for 25 period 0% of VT(Supply Voltage) for 250 period
No. of Dips / Interruptions:	3 per Level
Performance Criterion:	0% VD, 0.5 period----Performance criterion: B 0% VD, 1 period----Performance criterion: B 70% VD, 25 period----Performance criterion: C 0% VI, 250 period----Performance criterion: C
Test setup:	 <p>The diagram illustrates the test setup. An EMC Tester and an EUT (Equipment Under Test) are positioned on a Non-conducted table. The table is supported by four legs and has a height of 80cm. A Grounding cable is connected to the EMC Tester. A Ground Reference Plane is located 10cm below the top surface of the table.</p>
Test Procedure:	<ol style="list-style-type: none"> <li>1&gt;.The EUT and test generator were setup as shown on above setup photo.</li> <li>2&gt;.The interruptions are introduced at selected phase angles with specified duration.</li> <li>3&gt;.Record any degradation of performance.</li> </ol>
Test environment:	Temp.: 26 °C Humid.: 53% Press.: 1 010mbar
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

**Measurement Record:**

Test Level $U_T$	Duration (Periods)	Phase angle	No of dropout	Time between dropout	Observations (Performance Criterion)
0%	0.5	0°, 90°, 180°, 270°	3	10s	A
0%	1.0	0°, 90°, 180°, 270°	3	10s	A
70%	25	0°, 90°, 180°, 270°	3	10s	A
0%	250	0°, 90°, 180°, 270°	3	10s	B



## Remark:

A: No loss of function was observed.

B: During the test, the charging stopped, but after the test, the power charger can automatically return to normal

## 8 Test Setup Photo

Radiated Emission

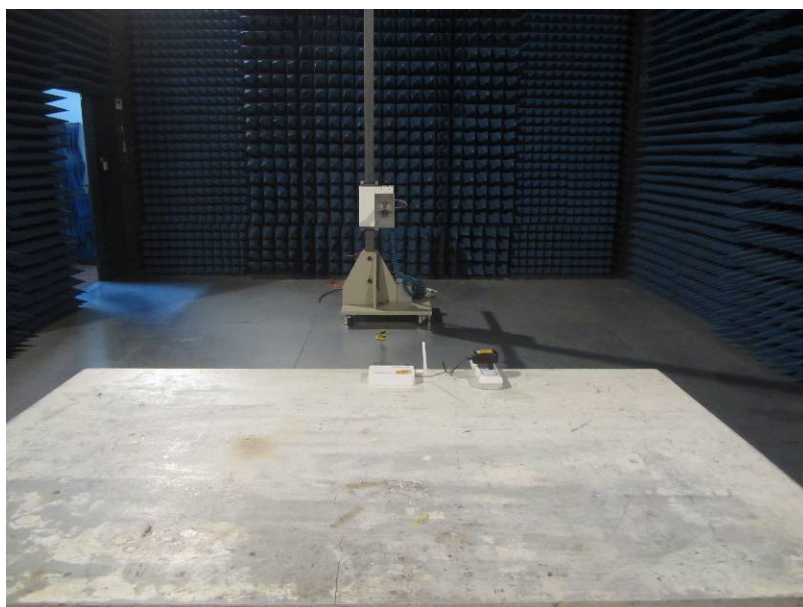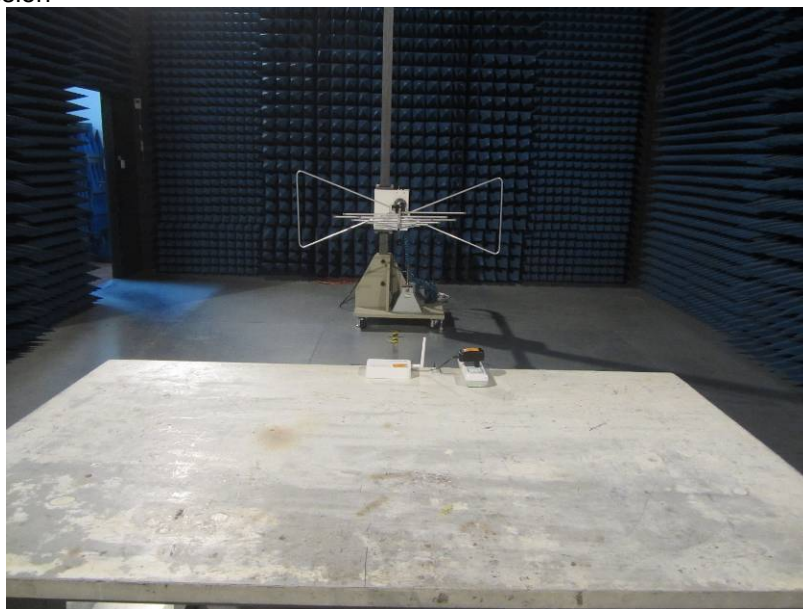

## Conducted Emission




## Flicker



## ESD




## Surges/EFT/V-dips

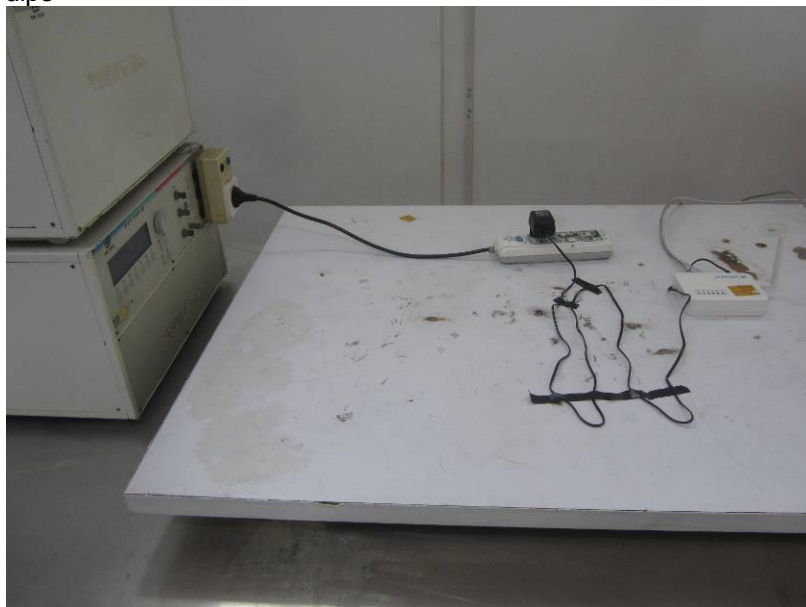





CS

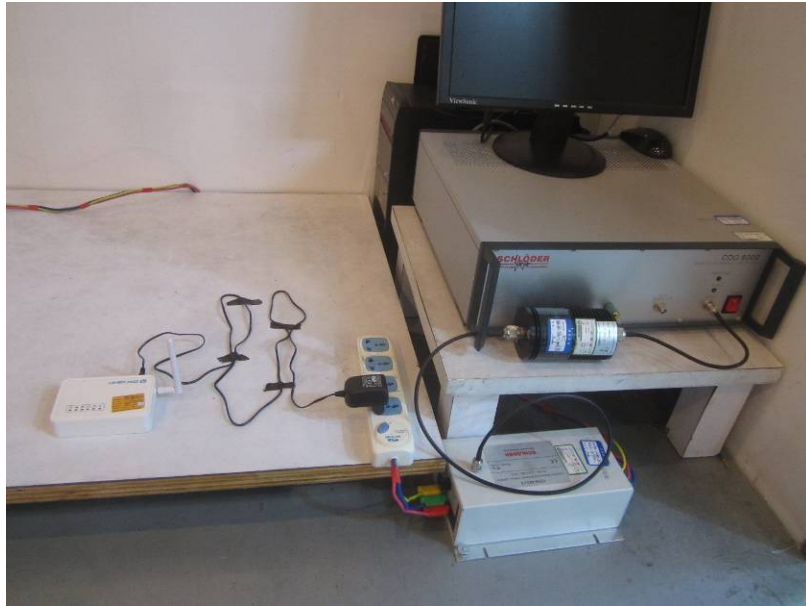




## 9 EUT Constructional Details





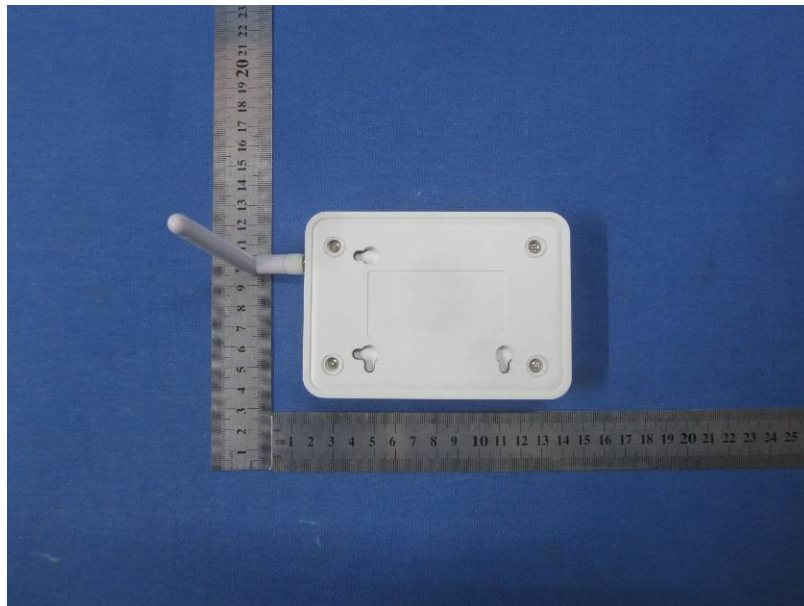


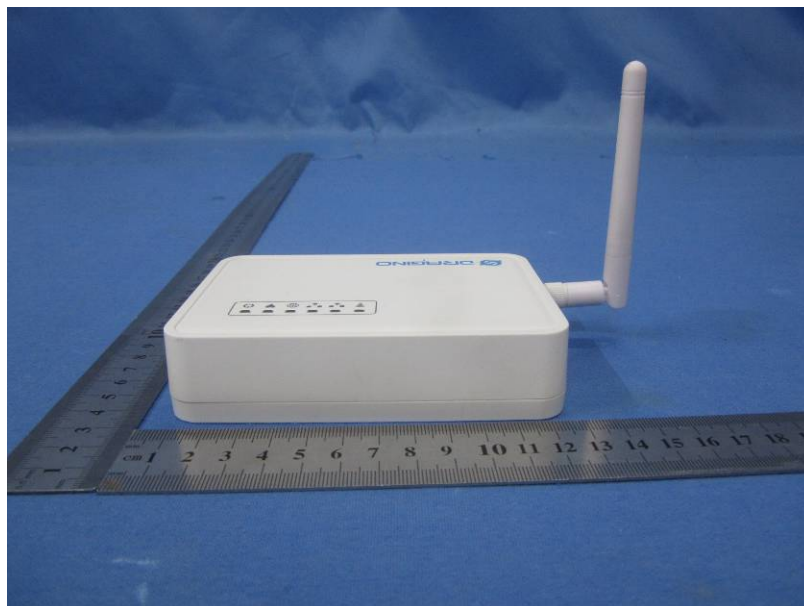


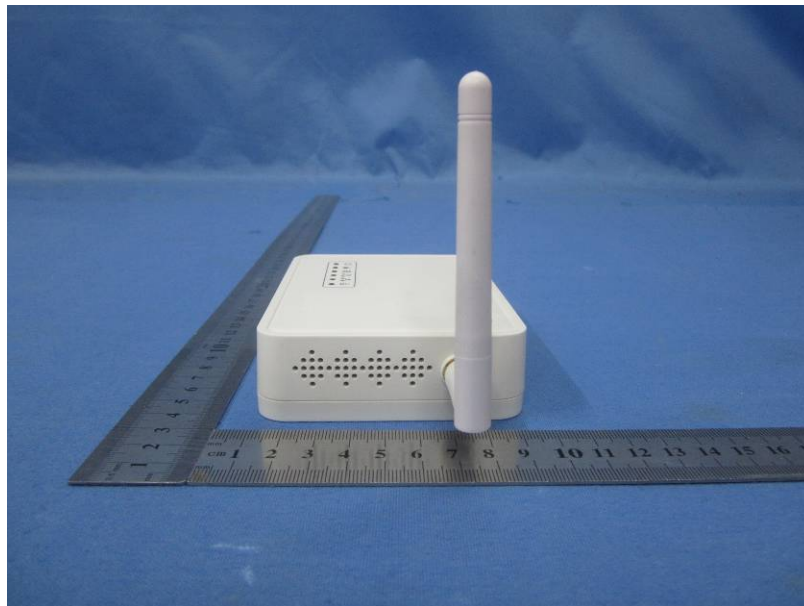


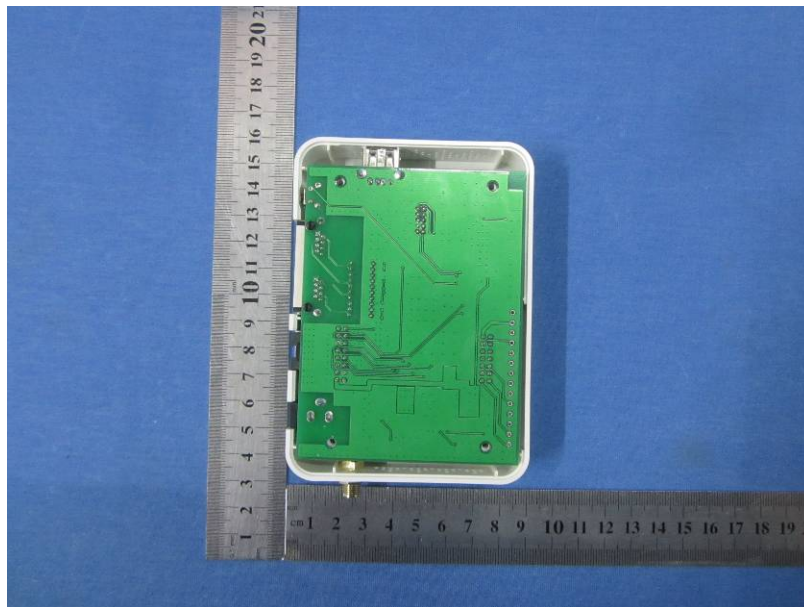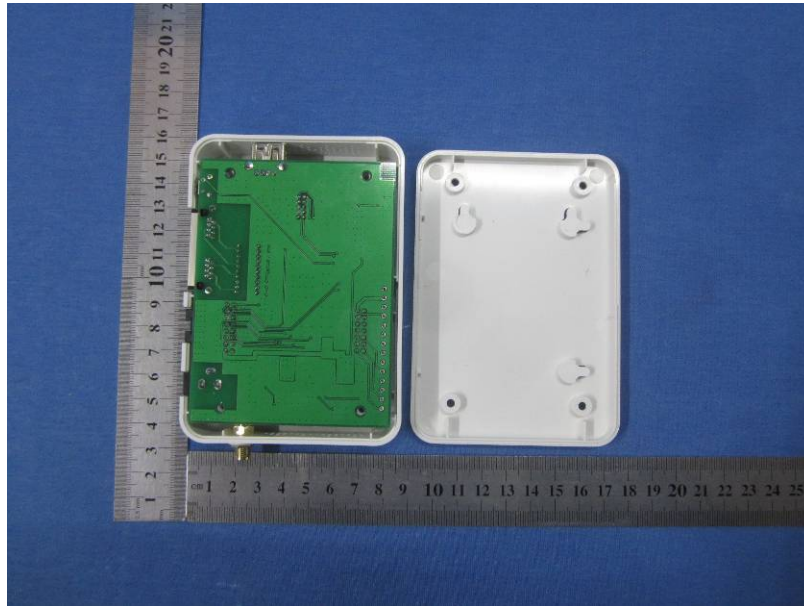


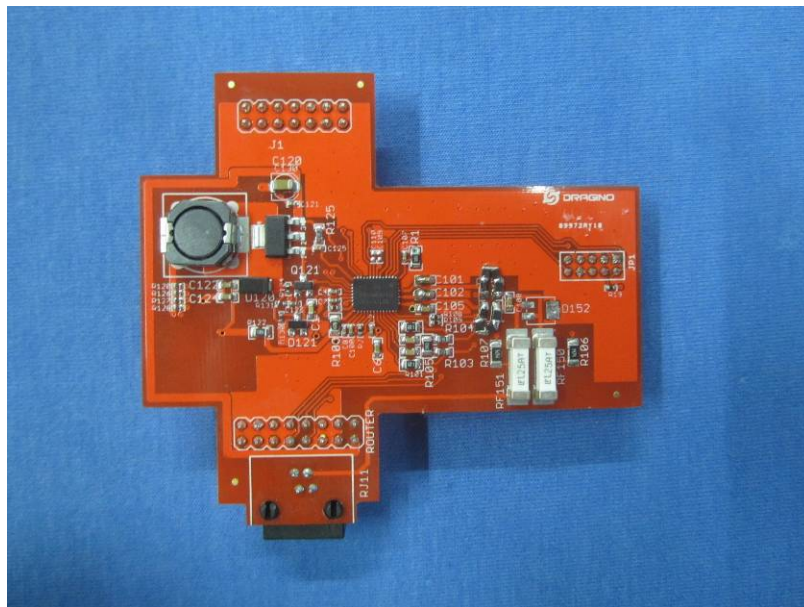

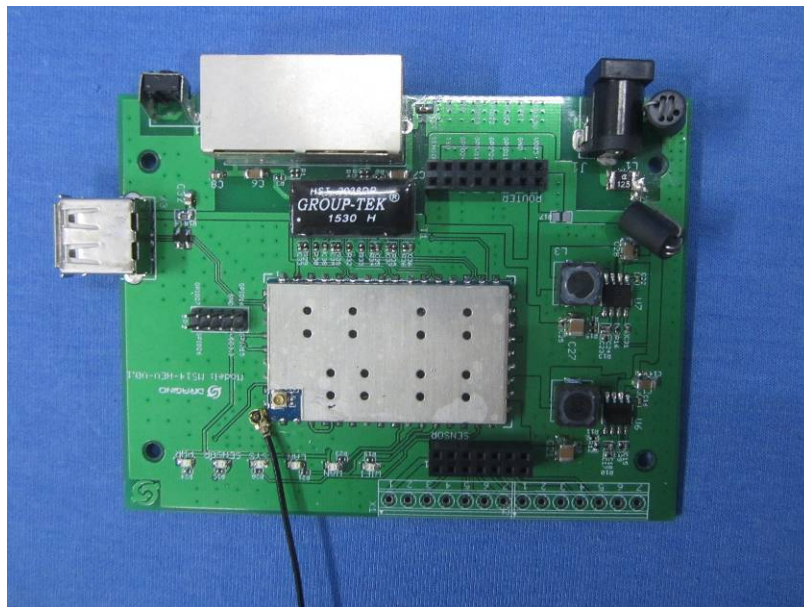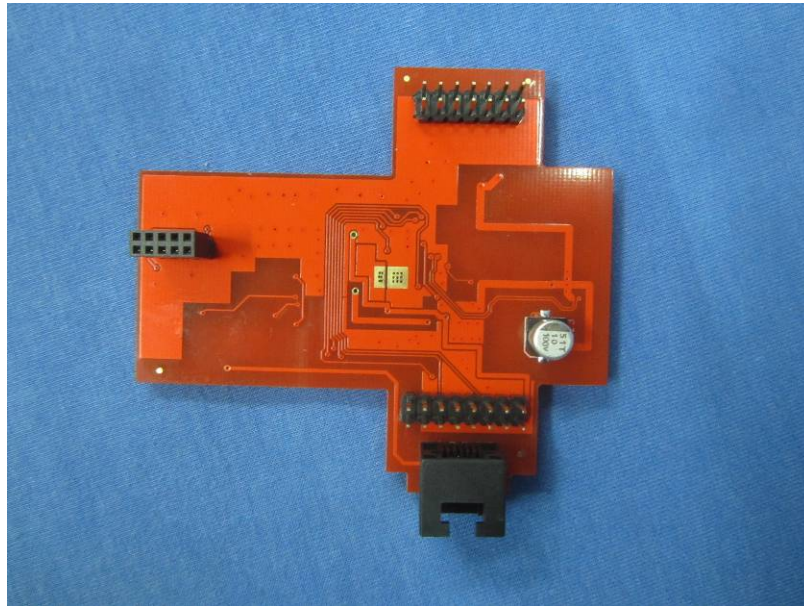



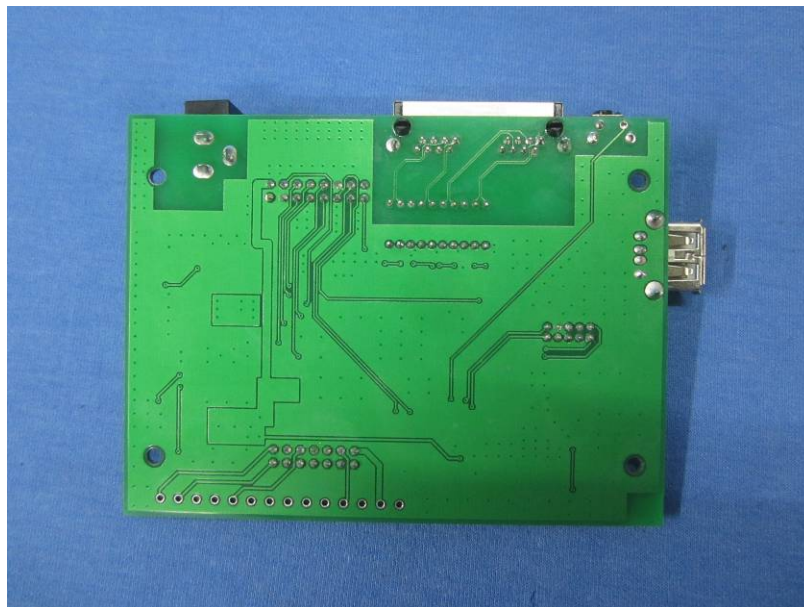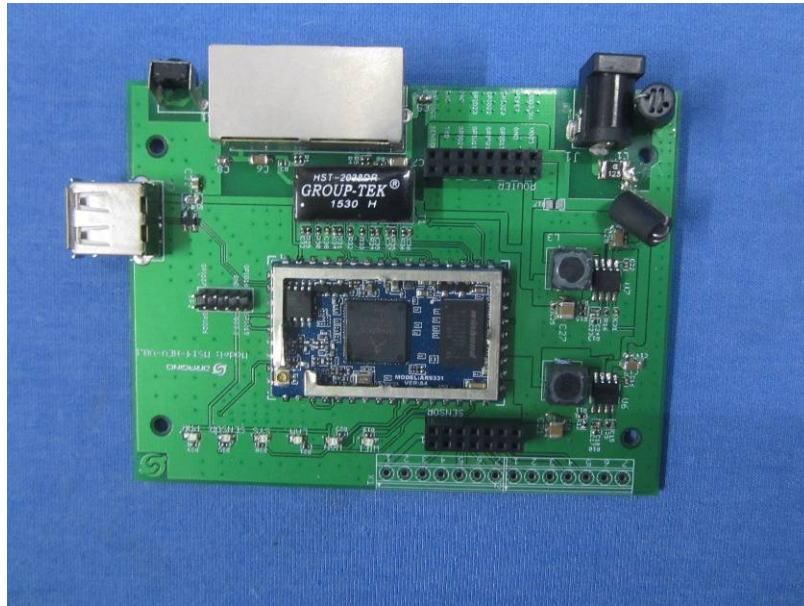

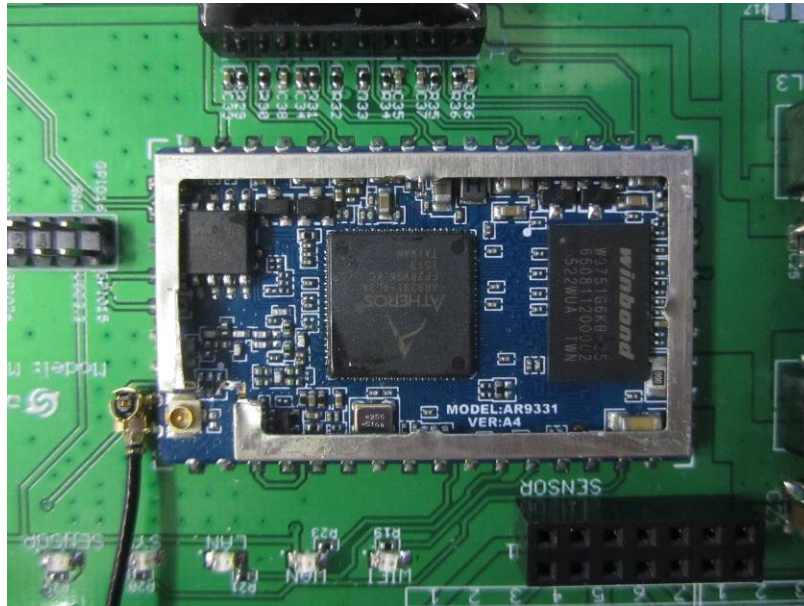

-----end-----